

Lecture Recorder x2™ User Guide



Epiphan Technical
Documentation

©2013

Epiphan Systems Inc.

All Rights Reserved

June 2013

Thank you for choosing Epiphan!

At Epiphan Systems Inc. (“Epiphan”), product function and quality are our top priority. We make every effort to make sure that our products exceed our customers’ expectations.

Product Feedback

We regularly contact our customers to ensure product performance and reliability. We strive to continually enhance our products to accommodate your needs. We welcome your feedback and suggestions for product improvements. You can email your comments to info@epiphan.com.

Specifications

You can go to the [Recording](#) page of the Epiphan website to get information about the Lecture Recorder x2.

Warranty

All Epiphan Systems products are provided with a 100% return to depot warranty for one year from the date of purchase.

Technical Support

Epiphan is staffed by a professional support team. If, after checking the FAQs for your product on the Epiphan website and re-installing the Epiphan driver software (where applicable), you continue to have outstanding issues, email a problem report to support@epiphan.com. To help us solve the problem efficiently, include the following info:

- Your Lecture Recorder x2 serial number.
- The behavior of your Lecture Recorder x2 LED indicators.
- Technical description of the signal source including resolution, refresh rate, synchronization, type of hardware.
- Complete description of the problem you are experiencing.

Copyright © 2013 Epiphan Systems Inc. All Rights Reserved.

Terms and Conditions

This document, the Epiphan web site, and the information contained therein, including but not limited to the text and images as well as Epiphan Systems Inc.'s trademarks, trade names and logos are the property of Epiphan and its affiliates and licensors, and are protected from unauthorized copying and dissemination by Canadian copyright law, United States copyright law, trademark law, international conventions and other intellectual property laws.

Epiphan, Epiphan Systems, Epiphan Systems Inc., and Epiphan logos are trademarks or registered trademarks of Epiphan Systems Inc., in certain countries. All Epiphan product names and logos are trademarks or registered trademarks of Epiphan. All other company and product names and logos may be trademarks or registered trademarks of their respective owners in certain countries.

Copyright © 2013 Epiphan Systems Inc. All Rights Reserved.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET OR PRODUCT INSTALLATION SOFTWARE PACKAGE THAT SHIPPED WITH THE PRODUCT OR THE PRODUCT DOCUMENTATION AND ARE INCORPORATED HEREIN BY REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR EPIPHAN REPRESENTATIVE FOR A COPY.

IMPORTANT: BEFORE DOWNLOADING, INSTALLING, OR USING THE SOFTWARE AND DOCUMENTATION, PLEASE CAREFULLY READ THE AGREEMENT WHICH CONTAINS THE TERMS AND CONDITIONS UNDER WHICH YOU ARE ACQUIRING A LICENSE TO USE THE SOFTWARE AND DOCUMENTATION. IF YOU DO NOT ACCEPT THE TERMS AND CONDITIONS OF THIS AGREEMENT PLEASE DO NOT DOWNLOAD, INSTALL, OR USE THE SOFTWARE AND DOCUMENTATION AND PROMPTLY RETURN OR DESTROY THE SOFTWARE AND DOCUMENTATION. IF YOU DOWNLOAD, INSTALL, OR USE THE SOFTWARE AND/OR DOCUMENTATION, YOU WILL HAVE ACCEPTED AND AGREED TO THESE TERMS AND CONDITIONS. THE SOFTWARE AND DOCUMENTATION ARE ALSO PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL COPYRIGHT TREATIES, AS WELL AS OTHER INTELLECTUAL PROPERTY LAWS. IF YOU ARE AN AGENT OR EMPLOYEE OF AN ENTITY, YOU REPRESENT AND WARRANT THAT (I) THE INDIVIDUAL ACCEPTING THIS AGREEMENT IS DULY AUTHORIZED TO ACCEPT THIS AGREEMENT ON SUCH ENTITY'S BEHALF AND TO BIND SUCH ENTITY, AND (II) SUCH ENTITY HAS FULL POWER, CORPORATE OR OTHERWISE, TO ENTER

INTO THIS AGREEMENT AND PERFORM ITS OBLIGATIONS UNDER THIS AGREEMENT.

PRODUCT DESCRIPTIONS AND SPECIFICATIONS REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. EPIPHAN PERIODICALLY ADDS OR UPDATES THE INFORMATION AND DOCUMENTS ON ITS WEB SITE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION AND RECOMMENDATIONS ARE BELIEVED TO BE ACCURATE AT TIME OF WRITING BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

LIMITATION OF LIABILITY

UNDER NO CIRCUMSTANCES SHALL EPIPHAN BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL, EXEMPLARY OR OTHER INDIRECT DAMAGES THAT RESULT FROM THE USE OF, OR THE INABILITY TO USE, THIS PRODUCT OR THE INFORMATION CONTAINED ON THIS DOCUMENT OR PROVIDED ON EPIPHAN'S WEB SITE, EVEN IF EPIPHAN HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT SHALL EPIPHAN'S TOTAL LIABILITY TO YOU FOR ALL DAMAGES, LOSSES, AND CAUSES OF ACTION RESULTING FROM YOUR USE OF THIS PRODUCT, WHETHER IN CONTRACT, TORT (INCLUDING, BUT NOT LIMITED TO, NEGLIGENCE) OR OTHERWISE, EXCEED THE AMOUNTS YOU PAID TO EPIPHAN DURING THE MOST RECENT THREE-MONTH PERIOD IN CONNECTION WITH AMOUNTS WHICH YOU PAID FOR USING THIS PRODUCT.

INFORMATION AND DOCUMENTS, INCLUDING PRODUCT SPECIFICATIONS, PROVIDED IN THIS DOCUMENT OR THE EPIPHAN WEB SITE ARE PROVIDED "AS IS." SPECIFICALLY, BUT WITHOUT LIMITATION, EPIPHAN DOES NOT WARRANT THAT: (i) THE INFORMATION IS CORRECT, ACCURATE, RELIABLE OR COMPLETE; (ii) THE FUNCTIONS CONTAINED ON THE EPIPHAN WEB SITE WILL BE UNINTERRUPTED OR ERROR-FREE; (iii) DEFECTS WILL BE CORRECTED, OR (iv) THIS WEB SITE OR THE SERVER(S) THAT MAKES IT AVAILABLE ARE FREE OF VIRUSES OR OTHER HARMFUL COMPONENTS. EPIPHAN SPECIFICALLY DISCLAIMS ALL REPRESENTATIONS, WARRANTIES AND CONDITIONS, EITHER EXPRESS, IMPLIED, STATUTORY, BY USAGE OF TRADE OR OTHERWISE INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, TITLE, SATISFACTORY QUALITY OR FITNESS FOR A PARTICULAR PURPOSE.

For additional terms and conditions, please refer to additional sections in this document.

1 Table of Contents

1	Table of Contents	1
2	Overview	5
2.1	Introduction.....	5
3	Physical Attributes	6
3.1	System Hardware Features	6
3.2	Cables, Connectors and Adapters	10
3.2.1	3.5 mm Mini-jack	10
3.2.2	VGA to DVI Cable	11
3.2.3	DVI to DVI Cable.....	11
3.2.4	S-Video Cable	13
3.2.5	Composite to S-Video Cable.....	13
3.2.6	HDMI to DVI Adapter	14
3.2.7	RJ-45 Male.....	14
3.2.8	Power over Ethernet (PoE) Injector	15
4	Getting Started	15
4.1	Supplying Power to the Lecture Recorder x2	15
4.2	Confirm Input Signals are Received	16
4.2.1	Checking the Signal from a DVI/VGA or HDMI Input source	16
4.2.2	Checking the Signal from an S-Video or Composite Source.....	16
4.2.3	Checking the Analog Audio Signal.....	17
4.3	Network Connections.....	17
4.4	Logging into the Web Admin Interface	17
4.4.1	Access through Service Discovery	17
4.4.2	Epiphan's Network Discovery Utility.....	18
4.4.3	Logging into the Web Admin Interface Using a Web Browser and the IP Address of the Lecture Recorder x2.....	18
4.5	Users Logging	19
4.5.1	The Administrator User.....	19
4.5.2	The Operator User	20
4.5.3	The Viewer User.....	20
4.6	Web Admin Interface	20
5	Signal Flow Diagrams.....	23
6	Video Formats and Standards.....	24
7	Signal Capture	25
7.1	Connecting Input Sources	25
7.1.1	Connecting DVI, VGA or HDMI Input Sources	26
7.1.2	Connecting Analog Video Input Sources	26
7.1.3	Connecting Audio Input Sources.....	26
7.2	Frame Grabber Adjustments	26
8	Channel Setup	30
8.1	Select Video Codec.....	30
8.2	DVI Channel Setup.....	32
8.3	Video Channel Setup	34
8.4	Picture In Picture Layouts.....	37
8.4.1	Select Background Color	37

8.5	Common settings	38
8.6	Select Audio Format	39
9	Streaming	41
9.1	HTTP or RTSP Streaming	42
9.2	Using a Content Distribution Network	43
9.2.1	Using Epiphan.tv Portal for Streaming	45
9.2.2	Using Epiphan's Partners as CDN Providers for Streaming	48
9.2.3	Setting up Multicast from Publish Stream	49
9.3	UPnP	53
9.4	Viewing Streaming Video	56
9.4.1	Retrieving the Stream's URL for Broadcasting	56
9.4.2	Using the Web Admin Interface's Info Page	56
9.4.3	Using the Web Admin Interface's Live View Feature	58
9.5	Viewing a Broadcast with a Browser	59
9.6	Viewing a Broadcast with a Media Player	60
9.7	Compatibility Information	61
10	Recording	63
10.1	User Viewing Experience: Single Channel Stream vs. Independent Streams 63	
10.2	Selecting Recording File Format	64
10.3	Changing Time and Size Limits	65
10.4	Selecting File Prefix	66
10.5	Starting and Stopping Recording	67
10.6	Viewing the Current Recording	68
10.7	Recording a Stream on iPad, iPhone and iPod touch	68
10.8	Recorded Files	69
10.8.1	Downloading Recordings	69
10.8.2	Deleting Files	70
10.8.3	Renaming Files	70
10.8.4	Viewing Completed Recording Files	71
10.8.5	Viewing Recorded Snapshots	71
10.9	File Transfer of Recorded Files	71
10.9.1	Copying Recorded Files to a USB Flash Drive	72
10.10	Automatic File Upload	74
10.10.1	Configuring Automatic File uploads	76
10.10.2	Configuring a CIFS Client	77
10.10.3	Configuring an RSync Client	79
10.10.4	Configuring an FTP Client	80
10.10.5	Testing the Automatic File Upload	81
10.11	FTP Server	81
11	Networking	82
11.1	Connecting Directly to the System	82

11.1.1	Rescue Settings.....	83
11.1.2	Connecting Directly to the Lecture Recorder x2.....	83
11.2	Network Discovery of the Lecture Recorder x2	84
11.2.1	Epiphan's Network Discovery Utility	84
11.2.2	Epiphan's EpiphanTouch App for iPad, iPhone, iPod	85
11.3	Setting IP Address.....	86
11.3.1	Set the Lecture Recorder x2 to use a static IP address.....	87
11.3.2	Set the Lecture Recorder x2 to use a DHCP server.....	88
11.3.3	Performing Network Diagnostics.....	89
12	System Administration	90
12.1	Setting the Date and Time.....	90
12.2	Configuring Administrator Access	93
12.2.1	To add or change the Administrator password	93
12.2.2	Deleting the Administrator password	94
12.3	Configuring Operator Access.....	94
12.3.1	To add or change the Operator password	94
12.3.2	Delete the Operator Password	95
12.4	Configuring Viewer Access	95
12.4.1	To add or change the viewer password.....	96
12.4.2	Configuring IP-based Authentication for Viewers	96
12.4.3	Delete the Viewer Password	98
12.5	Upgrading the System Firmware.....	98
12.5.1	Installing new firmware	98
12.6	Maintenance Controls.....	99
12.6.1	Restoring the Lecture Recorder x2 Default Factory Configuration	100
12.6.2	Rebooting or Restarting Lecture Recorder x2	100
12.6.3	Backing up Current Configuration	101
12.6.4	Restoring Configuration from File	101
12.6.5	Shutting down the Lecture Recorder x2	101
12.7	Lecture Recorder x2 System Information.....	101
13	Serial Port Configuring.....	104
14	Customizing Presentation and Web Content	105
15	Stream Branding.....	106
16	Configuring Remote Support	108
17	Disk Check	111
18	Disk Status Information	112
19	Configuring Using a Third-Party Application	113
19.1	Serial Port Configuration	113
19.2	RS-232 Commands	113
19.3	Retrieving a List of HTTP API Commands	115
19.4	Syntax for HTTP API Commands.....	115
19.5	Keys for HTTP API Commands	116

19.6	Device Info Keys	116
19.7	Broadcasting Setup Keys	117
19.8	ASF Encoder Keys	118
19.9	RTP Unicast Keys	119
19.10	Recorder Keys.....	119
19.11	Examples	119
20	Sample Configurations	120
21	Troubleshooting	124
22	Table of Figures	126
23	Software and Documentation License	128
24	Configuration Worksheet	136

2 Overview

2.1 Introduction

Epiphan's Lecture Recorder x2™ is a compact, portable solution combining both Ethernet-based audio-video broadcast streaming and recording functionalities. It transfers up to 30 frames per second of visual and audio information with resolution up to 1920x1080.

Input sources can be:

- a DVI/VGA/HDMI display or camera source
- an analog camera (S-Video or composite) source, and
- an analog audio source.

This flexibility of input sources gives the Lecture Recorder x2 the capability of synchronizing a high quality audio stream with a corresponding video stream. Streams can be encoded with Motion JPEG, MPEG4 or H.264 video compression.

When video from the two input sources is being used for either broadcasting or broadcasting and recording simultaneously the following format choices are available:

1. **Independent Channel Stream**, streams the video from the two input sources using two separate URLs. Recordings consist of a single multi-track file with two video tracks and one audio track. In this mode you cannot publish both streams through CDN or set up two multicast RTP streams.
2. **Single Channel Stream**, combines the input from the two video input sources using one URL and various picture in picture layouts. Recordings consist of one video track and one audio track.

The Lecture Recorder x2 is connected to a network with an Ethernet connection, once connected to the network, it can be configured and operated through an easy-to-use web interface. Recommended maximum operating temperature: 45°C. The Lecture Recorder x2 is ideal for educational and training institutions, creating sales and marketing videos and technical support how to demonstrations that require the ability to stream/record/synchronize a computer display along with live video.

Each channel which is being streamed is automatically assigned a unique URL. Viewers are simply provided with the required URL in order for them to watch the desired broadcast stream. Additionally, the Lecture Recorder x2 allows content producers to also record the broadcast to .AVI, .MOV, or MPEG-TS formatted files.

When configured for dual streaming, the Lecture Recorder x2 is being used for the simultaneous broadcasting from both a DVI/VGA/HDMI input source and either a composite or S-Video analog input source if this is not the case of publishing stream or multicast RTP stream. In addition to a single URL showing both streams, viewers may obtain two different URLs one for each of the input sources making up the broadcast. However, when the Lecture Recorder x2 is also recording a broadcast consisting of video input from its two video sources, it always records both video input sources into a single multi-track .AVI, .MOV, or MPEG-TS file. Whether this multi-track file consists of one or two video tracks depends upon whether the recording is being done using the Single Channel Stream configuration or the Independent Channel Stream configuration.

When recording broadcasts, recorded video files are stored in internal solid-state memory. Recorded video files can be archived to a network storage device such as a FTP server or copied to an inserted USB drive. When using FTP to transfer recorded files, the internal memory is used to provide buffering such that in the event the network is experiencing slow transfer rates, no captured data will be lost.

3 Physical Attributes

3.1 System Hardware Features

The Lecture Recorder x2 device is a 202mmx105mmx35mm (7.95"x4.13"x1.38") unit.

Figure 1 Front View of the Lecture Recorder x2



Below is a table summarizing the connectors and indicators found on the front panel of the Lecture Recorder x2.

Table 1 Summary of the Front Panel's connectors and Indicators

Number	Name	Description
1	Factory Reset Button	Resets the Lecture Recorder x2 back to its factory configuration defaults. In order to avoid accidentally resetting the device, a special sequence is required: • disconnect power to the device, • press and hold the Reset button as you reconnect the power. • the blue LED lights up. • keep pressing the Reset button until the blue LED turns off and the green LED lights up. • release the Reset button. Refer to the Restoring the Lecture Recorder x2 Default Factory Configuration section.
2	Record Stop/Start Toggle	Record on/off: toggles the recording on/off status.
3	Power and Capture LEDs	Red LED: During operation the red LED blinks each time the Lecture Recorder x2 captures an image. The red LED can be used as an indicator that the Lecture Recorder x2 is capturing images. When the input signal(s) stop(s) sending images, the red LED stops

		blinking. Green and blue LEDs: When the Lecture Recorder x2 device first starts up, the blue LED lights up. A few seconds later the green LED lights up. After about another 20 seconds the blue LED turns off, leaving the green LED on indicating that the Lecture Recorder x2 has started up and can start capturing images. During operation the blue LED blinks during video signal test operation and when the system tunes video parameters (e.g. VGA parameters). Blue LED: The blue LED blinks to indicate that the Lecture Recorder x2 is recording received images. If the files are not being recorded, the blue LED remains off. Note: Sometimes it may take more than 20 minutes to power up the device. During this time the blue LED is on and the green LED is blinking. It means that the Check disk function started automatically when the device powered up.
4	USB port	This expansion port allows the connecting of any of the following to the Lecture Recorder x2: an external HDD, a USB flash drive, a remote mouse control for the starting/stopping of a recording, or an RS-232 serial port for remote controls. It is important to note that due to resource constraints, simultaneous usage of multiple USB devices can seriously affect the performance of the Lecture Recorder x2.
5	S-Video input	Use this port to connect an S-Video source. To connect a composite video source, use a Composite to S-Video adapter which is included in the standard Lecture Recorder x2 package.
6	DVI In	Connects a DVI source to the Lecture Recorder x2 using the included DVI cable. To connect a VGA source, use the included VGA to DVI adapter. To connect an HDMI source (non-copy protected content) use the included HDMI to DVI adapter.
7	Audio In	Connects a microphone or audio source. The input can be mic or line.

The rear panel is illustrated below.

Figure 2 The Lecture Recorder x2's Rear Panel



Below is a chart detailing the connectors found on the rear panel.

Table 2 Summary of Connectors on the Rear Panel

Number	Connector	Description
8	Audio Out	Connects audio equipment, such as headphones or speakers, to confirm whether the audio stream is currently being captured by the Lecture Recorder x2.
9	DVI Out	Used to verify and confirm that the connected video source from DVI In port is being received. A DVI monitor or projector can be used with this port using the included DVI to DVI cable. Alternatively, if the device to be used to confirm the receiving DVI input signal is a VGA monitor, use the included DVI to VGA cable. This output can also act as a converter. For example if a VGA signal is on the input, the output can be provided as DVI or VGA. Note: To confirm that the connected video source from S-Video port is being received, please refer to the Troubleshooting chapter.
10	USB port	This is an additional USB expansion port as described

		above.
11	RJ45 Ethernet	Primary 10/100 Base-T RJ-45 Ethernet network port to connect the Lecture Recorder x2 to an Ethernet network. The Lecture Recorder x2's Ethernet port is auto-sensing. Power over Ethernet is used to power the Lecture Recorder x2. If the intended network connection does not provide power over Ethernet, use the Power over Ethernet Injector and this port in order to power the device.

3.2 Cables, Connectors and Adapters

The Lecture Recorder x2 can be connected to a number of different types of equipment using a variety of cables, and adapters. This section describes a subset of connectors, cables and adapters that are known to be compatible with the Lecture Recorder x2.

3.2.1 3.5 mm Mini-jack

A 3.5mm mini jack connector is used to carry audio signals. It can be connected to Lecture Recorder x2 to either its Audio In port or its Audio Out port.

Figure 3 3.5mm Mini-jack



3.2.2 *VGA to DVI Cable*

Connects a VGA source to either of the Lecture Recorder x2's DVI ports. This cable is included with the Lecture Recorder x2.

Figure 4 VGA to DVI cable



3.2.3 *DVI to DVI Cable*

Connects a DVI source to either of the Lecture Recorder x2's DVI ports. This cable is included with the Lecture Recorder x2.

Figure 5 DVI to DVI cable



3.2.4 *S-Video Cable*

Connects an S-Video output source to the Lecture Recorder x2's S-Video port.

Figure 6 S-Video cable



3.2.5 *Composite to S-Video Cable*

Connects a composite output analog video source to the Lecture Recorder x2's S-Video port. This cable is included with the Lecture Recorder x2.

Figure 7 Composite to S-Video cable



3.2.6 *HDMI to DVI Adapter*

Connects an HDMI source to either of the Lecture Recorder x2's DVI ports. This adapter is included with the Lecture Recorder x2.

Figure 8 HDMI to DVI adapter



3.2.7 *RJ-45 Male*

Connects the Lecture Recorder x2 to an Ethernet network.

Figure 9 RJ-45 Male cable



3.2.8 Power over Ethernet (PoE) Injector

The Lecture Recorder x2 incorporates a Power over Ethernet (PoE) technology. PoE delivers both data and electrical power to an Ethernet enabled device using a single Ethernet cable. This eliminates the need for the Lecture Recorder x2 to be situated close to a power outlet. This allows more freedom in its placement.

PoE injectors supply or inject direct current (DC) power through network cables to power network devices.

4 Getting Started

4.1 Supplying Power to the Lecture Recorder x2

To provide power to the Lecture Recorder x2, plug the provided PoE adapter into a 10/100Base-T Ethernet network using an Ethernet cable. This network must be running the TCP/IP protocol.

If your network does not provide Power over Ethernet, connect the Lecture Recorder x2 to an AC power outlet with the PoE adapter/injector connected to an Ethernet cable and plugged into the Lecture Recorder x2's RJ45 Ethernet port.

Regardless of the power source once connected, the Lecture Recorder x2 now powers up. Its power and activity LEDs will now light up following their start up sequence.

4.2 Confirm Input Signals are Received

Confirming that the input signals are being received by the Lecture Recorder x2 can be done once the Lecture Recorder x2 has been powered on and the input sources have been started.

First, check that the Lecture Recorder x2's red LED is blinking. A blinking LED indicates that the Lecture Recorder x2 is capturing images. If the red LED does not start flashing, check the input sources to ensure that they are transmitting a signal. Additionally, check that all cables from the input sources to the Lecture Recorder x2 are connected correctly.

Depending on the input source, the Lecture Recorder x2's output signal ports can be used to confirm that data from specific input sources are being captured

4.2.1 *Checking the Signal from a DVI/VGA or HDMI Input source*

The Lecture Recorder x2 has a DVI output port that is used to confirm that the signal from any of the above sources is being captured. In order to perform this verification ensure that there is an input source streaming to the Lecture Recorder x2 using its DVI input port. If yes, then connect a monitor to the Lecture Recorder x2 using the DVI output port and the appropriate DVI cable. The monitor will then display any data being captured by the Lecture Recorder x2 via its DVI input port.

4.2.2 *Checking the Signal from an S-Video or Composite Source*

The Lecture Recorder x2 does not come equipped with a mechanism to confirm the quality of the video input being received via its S-Video input video source. However, you can trouble shoot by this source by connecting an S-Video or composite receiver such as a TV or monitor to confirm that a high quality signal is being generated by the video source prior to connecting the S-Video or composite source to the Lecture Recorder x2.

4.2.3 *Checking the Analog Audio Signal*

As with any input source plugged into the Lecture Recorder x2's DVI input port, any audio input being sent to the Lecture Recorder x2 via its Analog Audio input port can be verified. To listen to the audio being captured by the Lecture Recorder x2, plug in a stereo speaker or headsets into the Analog Audio out port.

4.3 Network Connections

Please to refer to the Networking chapter for the instructions on direct System's connection to the Ethernet, discovering the System on the network, IP address settings and other details.

4.4 Logging into the Web Admin Interface

The Web admin Interface is accessible by logging into it using one of the following methods.

4.4.1 *Access through Service Discovery*

The **multicast Domain Name System** (mDNS) is a zero configuration host name resolution service. It allows a user to do without an IP address when performing access to the device. Bonjour software installed on a Windows or Mac machine supports mDNS.

To access the device through service discovery, the following conditions should be met depending on your OS:

Microsoft Windows – you must install Bonjour Print Services as explained below.

To install Bonjour Print Services on a Windows machine:

1. Use the following URL - <http://support.apple.com/kb/DL999>
2. Click Download.
3. Follow the system prompts to download the application on your computer.

MacOS X – Bonjour software which is used for service discovery comes built-in with Mac OS. Therefore Lecture Recorder x2 device can be accessed without any additional installations.

Linux – the Avahi implementation used for service discovery is shipped with most Linux distributions. Therefore most probably your device will be accessed without any additional installations. However you are recommended to address your administrator for the details first.

The simplest way to access Web Admin interface of your Lecture Recorder x2 in the local network is to type the following string in the address bar of your web browser:

<serial>.local

where <serial> is the serial number of your Lecture Recorder x2.

For example: **http://92033.local**

4.4.2 *Epiphan's Network Discovery Utility.*

The Epiphan Network Discovery Utility can be installed and executed from a workstation running Windows XP, Vista or Windows 7. Follow the following steps to access the Web admin Interface through this utility:

1. Start the Epiphan Network Discovery Utility tool.
2. Click **Search** to find all of the Epiphan devices on the network and select the desired Lecture Recorder x2.
3. Click **Web config**.
4. A web browser starts and you are prompted for the Lecture Recorder x2's administrator user name and password.
5. Enter the following information:
User Name: **admin**
Password: *configured password*<return>, there is no default password so unless a password has been configured, just hit <return>

The Web admin interface opens.

Alternatively the Network Discovery Utility can be used to retrieve the Lecture Recorder x2's IP address and access to the Web admin Interface will be done using a browser.

4.4.3 *Logging into the Web Admin Interface Using a Web Browser and the IP Address of the Lecture Recorder x2*

The web browser can be running on Windows, Mac OS X, Linux or any other operating system.

1. Start a web browser on any workstation connected to the same network as the Lecture Recorder x2.
2. Browse to the Lecture Recorder x2.
`http://<ip address of the Lecture Recorder x2>/admin`
The IP address of the Lecture Recorder x2 can be obtained using any of the following methods:
 - a. The Epiphan Network Utility
 - b. The EpiphanTouch app
 - c. From the network administrator
 - d. Using the Factory Default static IP address. Only if the steps in section, Connecting Directly to the Lecture Recorder x2, are followed
3. Log in as the Lecture Recorder x2's administrator user
User Name: **admin**
Password: *configured password*<return>, there is no factory default password so unless a password has been configured, just hit <return>

The Web admin Interface opens.

4.5 Users Logging

The Lecture Recorder x2 comes with three pre-configured users which can log in the control interface. The first is the administrator user, the user name is **admin**. The second is the operator user, the user name is **operator**. The third is the viewer user, the user name is **viewer**. Each can be assigned a password but their user names cannot be altered. It is not possible to create new user names.

Important: When you install firmware for the first time after purchasing the device, no default passwords are set.

4.5.1 The Administrator User

The administrator user is granted rights to log into the Lecture Recorder x2 and perform any of the following functions:

1. Perform configuration changes to the Lecture Recorder x2.
2. Manage the current broadcast. This can include the starting or stopping of the recording of the broadcast.
3. Manage previously recorded broadcasts. Including the archiving of recordings.

4. System monitoring. This would involve retrieving any system statuses and retrieving the solid state memory status.
5. **Upgrading the System Firmware** from Epiphan Support. New firmware is released to fix known problems or to add new features.
6. Perform network diagnostics.

As a default factory setting, the administrator user does not come with a password but it is recommended that a password is configured as early as possible for security reasons.

4.5.2 *The Operator User*

The operator user is granted rights to log in to manage broadcast recordings, configure audio and frame grabber settings, access the recorded files and perform network diagnostics.

As a default, the operator user does not come with a factory configured password. Configuring an operator password is optional.

4.5.3 *The Viewer User*


The viewer user is granted rights to log in to view broadcasts and does not have any administrative ability.

As a default, the viewer user does not come with a factory configured password. Configuring a viewer password is optional.

4.6 **Web Admin Interface**

In this section you can see a diagram showing the Web admin Interface's main menu. It is located on the left side of the screen.

Figure 10 Web Admin Interface's Main Menu

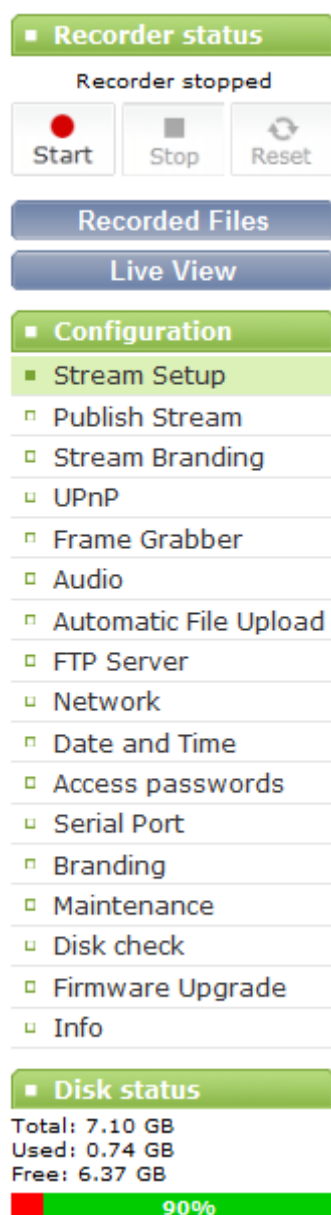

The following table briefly describes each of the options on the Web admin Interface's main menu.

Table 3 Web admin Interface's Main Menu Options

Stream Setup	Change the stream settings.
Publish Stream	Sends the stream to a remote streaming server such as a Content Distribution Network service provider (CDN) or Epiphan.tv portal
Stream Branding	Customize the recording and broadcast: specify the information that is displayed to a viewer and select the logo and "No signal" image.
UPnP	Access recorded files and streams on the local network using a media player via the UPnP protocols.
Frame Grabber	Make frame grabber image adjustments.
Audio	Change and adjust the audio input and headphone output.
Automatic File Upload	Set up automatic files uploading from the Lecture Recorder x2 device to a network storage device.
FTP Server	Configure FTP access settings to connect to the Lecture Recorder x2 internal solid state memory using an FTP client and the administrator, operator or viewer account.
Network	Change the Lecture Recorder x2 network configuration.
Date and Time	Change Lecture Recorder x2 date and time settings.
Access passwords	Change the admin, viewer and operator account password.
Serial Port	Integrate the Lecture Recorder x2 with other equipment featuring an RS-232 port and control your device over the RS-232 connection.
Branding	Customize design of the browser where the broadcast is viewed.
Maintenance	Reboot or shut down the Lecture Recorder x2 device. Restore factory configuration.
Disk Check	Set a Maintenance Schedule for checking the Lecture Recorder x2 solid-state memory for errors.
Firmware Upgrade	Upgrade the Lecture Recorder x2 firmware.
Info	Display information about the Lecture Recorder x2 Firmware and hardware, broadcasting and recording status, available streams, input video signal.
Disk Status	View the total solid state memory in GB, the used and available hard solid state memory in GB, and also the amount used as a percentage of the total solid state memory.

5 Signal Flow Diagrams

A series of diagrams below depicts how signal capture, encoding, streaming and recording is performed.

Figure 11 Data Capture Flow in case of Single Stream Mode

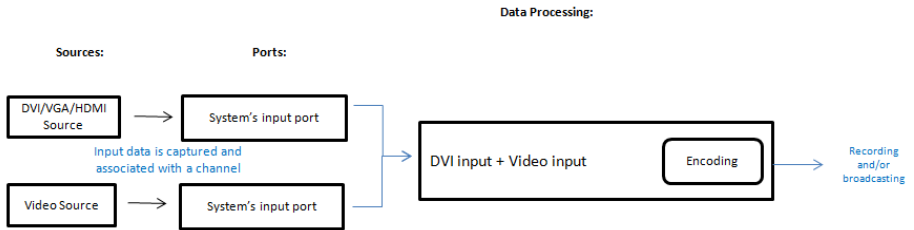


Figure 12 Data Capture Flow in case of Independent Stream Mode


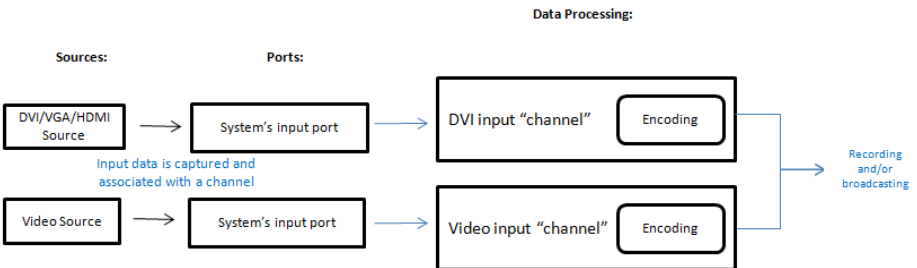


Figure 13 Data Streaming Flow

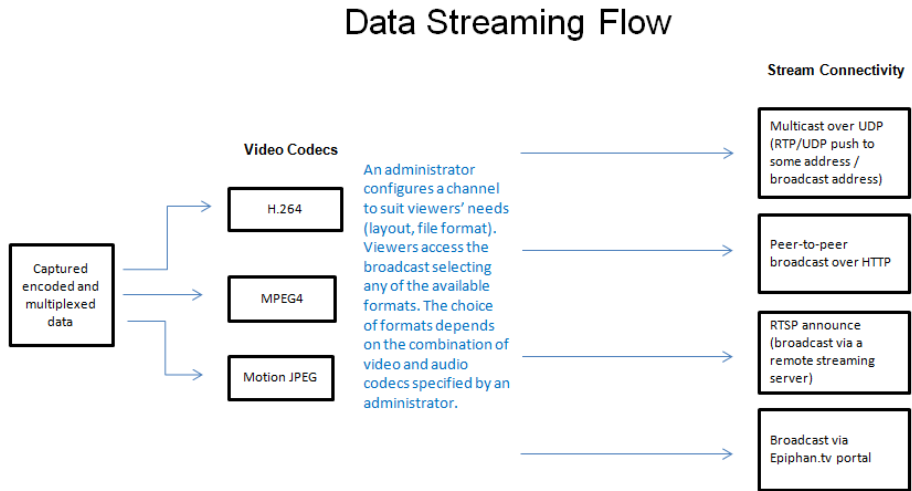

6 Video Formats and Standards

The Lecture Recorder x2 supports broadcasting of various standards and formats. The choice of video format will depend on the broadcast content and performance requirements. For example, Motion JPEG does not support audio from an external source. It also depends on how the intended viewers are planning to receive and play the broadcast. Keep in mind that browser viewer capabilities and compatibilities are subject to change.

With the Lecture Recorder x2, video codec for streaming is selected by an administrator. After this action the system creates a list of available streaming formats for this codec. Users can view the broadcast in any available format depending on their preference. Moreover, multiple users can view the same broadcast in different formats. The list of formats available for the selected combination of video and audio codecs displays on the Info page of the Web admin interface.

The Lecture Recorder x2 can stream video using Flash (H.264), ASF (MPEG4 or H.264 codecs), Motion JPEG, RTSP (MPEG4 or H.264 codecs), or MPEG-TS (H.264). A quick definition of these video streaming methods and the type of application that a viewer would use to watch that particular video stream is now provided.

The **Adobe Flash Video stream type** is proprietary but is supported on most web browsers and on many media players including the VLC Media Player. This stream type supports the H.264 standard. This video supports analog audio from an external source.

The **Advanced System Format (ASF) stream type** also called Advanced Streaming format, can be viewed with the Windows Media Player or the VLC Media Player. Additional codecs may need to be installed to view ASF files. This stream type supports H.264 and MPEG4 standards. This video supports analog audio from an external source.

The **Motion JPEG stream type** records each frame in the video in JPEG format and can be viewed using most web browsers. This video format does not support analog audio from an external source.

The **RTSP type** supports many media players including QuickTime and MPlayer. This file type supports H.264 and MPEG4 standards. This video supports analog audio from an external source.

The **MPEG Transport Stream (MPEG-TS)** type supports many software and hardware media players. This stream type conforms to H.264 standards.

Note: Media Player, browser, viewer capabilities and compatibilities are subject to change.

7 Signal Capture

7.1 Connecting Input Sources

It is recommended that prior to powering up the Lecture Recorder x2, the input sources are connected first. This input source can be a DVI, VGA or HDMI source. Any one of these sources would be connected to the Lecture Recorder x2 using its DVI input port. Alternatively or additionally, it can be an S-Video or composite video source using the Lecture Recorder x2 S-Video port. Audio input will be connected to the Lecture Recorder x2 Audio in port.

7.1.1 *Connecting DVI, VGA or HDMI Input Sources*

All DVI, VGA or HDMI input sources are connected to the Lecture Recorder x2 using the DVI input port. How this connection is made and using which cable is dependent on the input source.

DVI input sources are connected using the DVI to DVI cable, Figure 5 DVI to DVI cable.

VGA input sources are connected using the VGA to DVI cable, Figure 4 VGA to DVI cable.

HDMI input sources are connected using the HDMI to DVI adapter, Figure 8 HDMI to DVI adapter. These sources should only be non-copy protected content.

Note that an HDMI signal containing audio will not be captured.

7.1.2 *Connecting Analog Video Input Sources*

When using an S-Video input source with the Lecture Recorder x2, the connection between this input source and the Lecture Recorder x2 is done using the S-Video Cable, Figure 6 S-Video cable and the Lecture Recorder x2 S-Video input port.

For all composite video input sources, the connection is made using the Composite to S-Video cable, Figure 7 Composite to S-Video cable.

7.1.3 *Connecting Audio Input Sources*

All audio sources are connected to the Lecture Recorder x2 using the audio input port.

7.2 **Frame Grabber Adjustments**

A frame grabber is an electronic device that captures individual still frames from an analog video signal or a digital video stream and transmits them in a digital form. An Epiphan frame grabber is a subsystem component in the Lecture Recorder x2 and can be configured separately. From the Web admin interface, select **Frame Grabber** from the main menu to configure Frame Grabber adjustments.

The Lecture Recorder x2 automatically adjusts image capture settings every time it starts up. The automatic image adjustment is repeated every 60 seconds during operation. The interval between automatic adjustments can be changed to have them occur more or less often. The capture settings attempt to produce the best quality captured image for the equipment being used.

Normally, making manual image adjustments should not be necessary. This means that there are no default Frame Grabber adjustment settings. However, special requirements may exist that produce image quality problems that can only be fixed by making image adjustments.

The Frame Grabber adjustments page within the Web admin interface contains most of the information needed to make image adjustments. This includes a brief description of the effect created as a result of each adjustment and the adjustment range.

To make an adjustment, add a value to one or more fields and select **Apply**.

To clear any adjustments, delete the value from one or more fields and select **Apply**.

Figure 14 Frame Grabber Adjustments

Frame Grabber Adjustments

Use signal from

You could leave any field empty to enable autoconfiguration algorithm for the appropriate parameter

Frame Grabber analyzes incoming VGA signal with specified time interval. Valid values are from 0-9999 seconds (0 - disables periodic signal analysis).

Interval between VGA signal autoadjustments, sec

Frame Grabber analyzes incoming VGA signal with specified time interval. Valid values are from 0-9999 seconds (0 - disables periodic signal analysis).

Vertical shift

From -20 to 20. Positive value shifts image up, negative value shifts image down.

Horizontal shift

From -999 to 999. Positive value shifts image left, negative value shifts image right.

Phase

From 0 to 31.

PLL adjustment

From -999 to 999. Changes number of the pixels in the line.

Offset

From 0 to 63. 0 - brighter, 63 - darker.

Gain

From 0 to 255. 0 - brighter, 255 - darker.

Aspect ratio

HSync threshold

From 0 to 255. Adjusts horizontal sync detection.

VSyn threshold

From 0 to 255. Adjusts vertical sync detection.

EDID upload

No file chosen

Select EDID file

The table below discusses all options found on the Frame Grabber Adjustment page.

Table 4 Frame Grabber Adjustment Options

Use signal from	Specify the the native colour space of the signal source, either RGB or YUV. The following values are available: - VGA/DVI signal (RGB) – default setting - Component signal (YCrCb)
Interval between VGA signal autoadjustments, sec	Change the interval between automatic adjustments if you want them to occur more or less often. To suspend automatic adjustments, enter 0.
Vertical shift	Configure the vertical shift to offset the captured image's position. For example, a captured image that is shifted slightly downward or vertically can be corrected with minor adjustments to the vertical shift settings. Increasing or decreasing the value entered in the Vertical Shift field shifts the image up or down.
Horizontal shift	Configure the horizontal shift to offset the captured image's position. For example, a captured image that is shifted slightly to the right or horizontally can be corrected with minor adjustments to the horizontal shift settings. Increasing or decreasing the value entered in the Horizontal Shift field shifts the image to the right or left.
Phase	This setting adjusts the vertical synchronization properties of the image. You may need to change it when there is a repetitive distortion or blurriness on the horizontal axis of the image. Adjust the setting in small steps until a sharper image is displayed.
PLL adjustment	This setting is used to squeeze or stretch the image horizontally.
Offset	Use the offset and gain controls together to optimize image quality. Increasing the offset reduces background noise but also reduces the overall signal. Balance offset and gain values to achieve the best quality image. Adjust these settings by the smallest values possible to

	achieve the best results. Compensate for a large change to one by making a large change to the other, but setting both offset and gain to high values can result in poorer video quality.
Gain	Use the offset and gain controls together to optimize image quality. Increasing the gain amplifies weak signals but also increases noise. Balance offset and gain values to achieve the best quality image. Adjust these settings by the smallest values possible to achieve the best results. Compensate for a large change to one by making a large change to the other, but setting both offset and gain to high values can result in poorer video quality.
Aspect ratio	Sets the aspect ratio of the captured image. The default aspect ratio is 4:3. The aspect ratio can be set to wide mode in order that the Lecture Recorder x2 can accurately capture wide aspect ratio modes. It's not always possible for the Epiphan device driver to distinguish between analogue (or VGA) video modes when they have the same number of rows, for example, 1024x768 and 1280x768. In these situations change the aspect ratio to Wide Mode.
Select EDID file	Browse to the Extended display identification data (EDID) file to be uploaded. EDID is the information about display's supported resolutions, timings, formats, chromacity, and other media parameters. This information can be used by a signal source for adaptation to the characteristics of a device accepting the signal. Use this URL to upload EDID files: http://www.epiphan.com/downloads/edid/

8 Channel Setup

This chapter explains how to select video codec, configure channels and audio.

8.1 Select Video Codec

Before starting the video recording or broadcasting process, you have to specify the video codec for encoding. It can be selected on the Stream Setup section of the channel's page.

To select the video codec:

1. Select the required channel.
2. Click the Stream Setup option.
3. Click an arrow in the **Codec** field.
4. Select the required codec from the drop-down list. The following values are available for selection:
 - H.264
 - MPEG4
 - Motion JPEG

After you have specified required video and audio codecs (as described in this section and in the Select Audio Format section), click the Info menu option of the Web Admin interface to see available broadcasting formats for your settings and obtain the IP addresses for the broadcast.

Figure 15 Stream Settings

Stream setup

Codec:

Video encoding preset:

Video encoding profile:

☐ Enhanced compatibility mode (h.264 slicing for RTP)

Table 5 Stream Setup Settings

Video encoding preset	Defines how a video stream should be encoded: - at a high quality - at a high speed - according to the default system settings.
Video encoding profile	Select one of the following encoding profiles that target specific classes of applications: 1. Baseline: for applications requiring additional data loss robustness, e.g. videoconferencing 2. Main: for standard-definition broadcasts 3. High: for broadcast and disc storage applications

	This parameter can be set for the H.264 codec only.
Enhanced compatibility mode (h.264 slicing for RTP)	This parameter provides operating stability if the transmitted video/audio stream is not quite supported by the viewer's equipment. When this parameter is activated, each picture is subdivided into one or more slices. The slice is given increased importance in H.264 as the basic spatial segment that is independent from its neighbours. Thus, errors or missing data from one slice cannot propagate to any other slice within the picture.

Lecture Recorder x2 can capture analog and digital signals. When you log in to the control interface, under the Stream Setup section you can configure both Lecture Recorder x2 channels— DVI channel and Video channel. The following sections explain how to configure both channels.

8.2 DVI Channel Setup

The following settings can be made for the DVI channel:

Figure 16 DVI Channel Settings

DVI channel

Show time label: [Show substitutions](#)

Frame size: x pixels

4:3 → [640x480](#) [768x576](#) [800x600](#) [1024x768](#) [1152x864](#) [1280x960](#) [1600x1200](#)

16:9 → [640x360](#) [1280x720](#) [1600x900](#) [1920x1080](#)

16:10 → [960x600](#) [1280x800](#) [1440x900](#) [1680x1050](#) [1920x1200](#)

Key frame interval: ▼

Limit frame rate:

Bitrate: kbits

Quality parameter: — for MJPEG only

Below is a table showing the DVI source settings that are configurable.

Table 6 DVI Channel settings

Show time label	If the video needs to be time labeled or timestamped, this parameter allows how the date and time will be displayed. Click on Show substitutions and use the Format substitutions commands to select the desired date and time format. The commands are described in table 7 below. If time labeling is not required, leave this field blank.
Frame size	Select a frame size from the drop down list to limit the width and height of the video image. If the video source is sending resolutions larger than the resolution limit configured, the video image will be scaled to the resolution limit. Limiting the frame resolution can help to reduce bandwidth usage. Note that the final frame size can be larger in case the Picture in Picture layouts are used. For the Side-by-Side and Video-outside-DVI/VGA modes the largest height from both resolutions is used. The resulting width is equal to the total width amount for both resolutions.
Key frame interval	Controls the number of frames. Key frames define the starting and ending points of any smooth transition.
Limit frame rate	Enter a value in terms frames per second. This field is used to set a frame rate that is lower than the maximum frame rate at which the Lecture Recorder x2 can capture images. Reducing the frame rate reduces the number of images being captured by the device. Decreasing the frame rate can help to reduce bandwidth usage.
Bitrate	Enter a DVI signal bitrate. A lower bitrate produces lower quality videos and smaller file sizes. A higher bitrate produces better quality videos and larger file sizes. Please refer to the following diagrams: Figure 73 Correlation Between FPS and Bitrate Values at Resolution 1280x720 Figure 74 Correlation Between FPS and Bitrate Values at Resolution 1920x1080 Figure 75 Correlation Between FPS and Bitrate Values at Resolution 640x480
Quality parameter (for	This parameter is similar to Bitrate. Use bigger values to

MJPEG only)	improve the quality of the broadcast.
-------------	---------------------------------------

Table 7 Format Substitutions Commands

Command	Value	Example (27/09/2012 10:50:45.378)
date	%F	2012-09-27
year	%G	2012
month (as 01)	%m	09
month (as Jan)	%b	Sep
month (as January)	%B	September
day of month	%d	27
weekday (as Thu)	%a	Thu
weekday (as Thursday)	%A	Thursday
time	%T	10:50:45
hour	%k	10
minute	%M	50
second	%S	45
ms	%#m	378

8.3 Video Channel Setup

The following settings can be made for the video channel on the Stream Setup page from the Web admin interface's main page.

Figure 17 Video Channel Settings

Video channel

☐ Enable video channel

Picture-in-picture layout:

☐

☐

☒

☐

☐











Independent streams Video inside DVI/VGA Video outside DVI/VGA

Background color:

Video signal type:

Frame size:

Show time label: [Show substitutions](#)

Key frame interval:

Limit frame rate:

Bitrate: kbits

The table below outlines the video channel video configurable options.

Table 8 Video Channel Settings

Enable video channel	Select this checkbox to enable the recording of the video signal from the analog video source.
Picture-in-picture layout	Use these radio buttons to specify how the DVI/VGA and S-Video/composite video sources are streamed when both are being used. These settings are explained in the Picture In Picture Layouts section.
Background color	Specify the background colour for the blank part of the screen in the Video outside DVI/VGA mode.

Video signal type	Select the video signal type coming from the S-Video source: - S-Video - Composite
Frame size	Select a Frame size from the drop-down list to limit the width and height of the video image. If the analog video source is sending resolutions larger than the resolution limit they will be scaled to the resolution limit. Limiting the frame resolution can help to reduce bandwidth usage.
Show time label	If the analog video needs to be time labeled, use this parameter to specify how the date and time will be displayed. Use the Format substitutions commands to select the necessary date and time format. The commands are described in table 7. Note: This option is available in the Independent Streams mode only.
Key frame interval	Controls the number of seconds between key frames. Note: This option is available in the Independent Streams mode only.
Limit frame rate	Enter a value in terms of frames per second. This field is used to set a frame rate that is lower than the maximum frame rate at which the Lecture Recorder x2 can capture images. Reducing the frame rate reduces the number of images being captured by the device. Decreasing the frame rate can help to reduce bandwidth usage. Note: This option is available in the Independent Streams mode only.
Bitrate	Enter the signal bitrate. A lower bitrate produces lower quality videos and smaller file sizes. A higher bitrate produces better quality videos and larger file sizes. Note: This option is available in the Independent Streams mode only. Please refer to the following diagrams:

	Figure 73 Correlation Between FPS and Bitrate Values at Resolution 1280x720 Figure 74 Correlation Between FPS and Bitrate Values at Resolution 1920x1080 Figure 75 Correlation Between FPS and Bitrate Values at Resolution 640x480
--	--

8.4 Picture In Picture Layouts

If you are capturing video from two video sources, you can create a layout for the recording/broadcast, i.e. specify how two videos are positioned on a screen relative to each other.

Please keep in mind that the final frame size can be larger (particularly for the Video outside DVI/VGA layouts). Bitrate, limit frame rate and key frame interval values are taken from the DVI channel settings.

To create a layout for the videos from two sources:


1. Connect two video sources to the device
2. Select **Stream Setup** section in the Web admin interface.
3. Select the **Enable video channel** check box.
4. Select the Picture-in-picture layout radio button, either **Video inside DVI/VGA** or **Video outside DVI/VGA**, with the required position of the inset window.
 - **Video inside DVI/VGA** – the DVI/VGA stream is displayed on the full screen at the same time as the analogue stream is displayed in the left or right inset window. The streams are superimposed.
 - **Video outside DVI/VGA** - the DVI/VGA stream is displayed in the bigger screen at the same time as the analogue stream is displayed in the smaller screen. The streams are not superimposed.

8.4.1 Select Background Color

If you selected the Picture-in-picture layout and the **Video outside DVI/VGA** mode, it is possible to specify the background color for the blank part of the screen.

Use the **Background color** drop-down list in the Stream Setup section of the Web admin interface to select the background color. On the figure below red arrows indicate the screen's part for which you can specify the color.

Figure 18 Setting Background Color

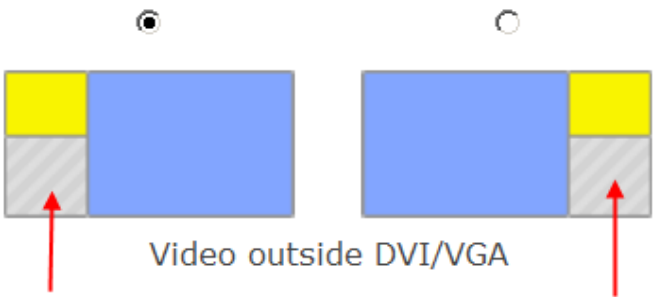

8.5 Common settings

The following common parameters can be additionally specified:

Table 9 Common settings

Rate control mode	Used for H.264 and MPEG4 codecs. It specifies the bitrate encoding for the signal. Select one of the following: - Low Delay Means Constant Bitrate Encoding (CBR) will be used. CBR is useful for streaming multimedia content on limited capacity channels since it is the maximum bit rate that matters, not the average. Therefore, CBR would be used to take advantage of all of the channel capacity. - Storage Means Variable Bitrate Encoding (VBR) will be used. This produces a better quality-to-space ratio compared to a CBR file of the same data. VBR files vary the amount of output data per time segment and the FPS value may be lower.
HTTP streaming port	The number of the port being used to stream the HTTP broadcast. This value would be used along with the URL to access the broadcast. In the case when independent

	streaming is being used and there are two streams, this value remains the same for both of the URLs being used. The port number cannot be lower than 500. In case of RTSP streaming this value is not considered.
RTSP streaming port	The number of the port being used to stream the RTSP broadcast. This value would be used along with the URL to access the broadcast. In the case when independent streaming is being used and there are two streams, this value remains the same for both of the URLs being used. The port number cannot be lower than 500.

Figure 19 Common Settings

Common settings

Rate control mode:

HTTP streaming port:

RTSP streaming port:

The **Page refresh time** parameter in the MJPEG webpage section is available if the Motion JPEG codec is selected.

Page refresh time	Specify how often the browser updates the visual information coming from the Lecture Recorder x2. In other words, how often the page is refreshed
--------------------------	---

8.6 Select Audio Format

The Audio settings pane in the control interface can be accessed by clicking the Stream Setup option from the menu. Select the **Enable audio** checkbox and specify the audio signal parameters.

Table 10 Audio settings

Enable audio	Select this checkbox to enable audio for the broadcast.
Audio format	You can select the following audio formats: • MP3 – a common audio format for consumer audio storage • Raw PCM (Pulse Code Modulation) – a standard form for digital audio in computers as well as other uses such as digital telephone systems • G.711 – an ITU-T standard for audio companding. It is a very commonly used waveform codec. ○ μ-law is used primarily in North America ○ A-law is in use in most other countries outside North America • AAC - a standardized, lossy compression and encoding scheme for digital audio. AAC generally achieves better sound quality than MP3 at similar bit rates.
Audio channels	Select either mono (1 channel) or stereo (2 channels) sound.
Audio bitrate	Select the audio bitrate value for the broadcast.

Figure 20 Audio Settings

Audio settings

☒ Enable audio

Audio format:

AAC 22 kHz

Audio channels:

Stereo

Audio bitrate:

192 kbps

Apply

9 Streaming


There are several decisions that need to be made when planning the creation of a broadcast, besides its exact content of the broadcast. Will the broadcast include an audio component coming from an analog audio source? What video format to use, what video standard to use, how to stream the broadcast are all questions that have to be answered when creating a broadcast. Most of the answers depend on the intended audience of the broadcast, how are the viewers going to view the broadcast, and how many simultaneous viewers are expected to view the broadcast? Where are the viewers located in relation to the where the broadcast is being streamed? What are the performance expectations? These are the types of questions that will determine the overall design of the broadcast.

This chapter outlines how a suitable design of a broadcast can be architected based on these types of questions and their resulting answers and how the System can be used in this design.

The Lecture Recorder x2 supports streaming of various standards and formats. The choice of video format will depend on the broadcast content and performance requirements. For example, Motion JPEG does not support audio from an external source. It also depends on how the intended viewers are planning to receive and play the broadcast. Keep in mind that browser viewer capabilities and compatibilities are subject to change.

With the Lecture Recorder x2, video codec for streaming is selected by an administrator. After this action the system creates a list of available streaming formats for this codec. The figure below is representation of the protocol stack diagram showing how the video data is processed.

Figure 21 Protocol Stack Diagram

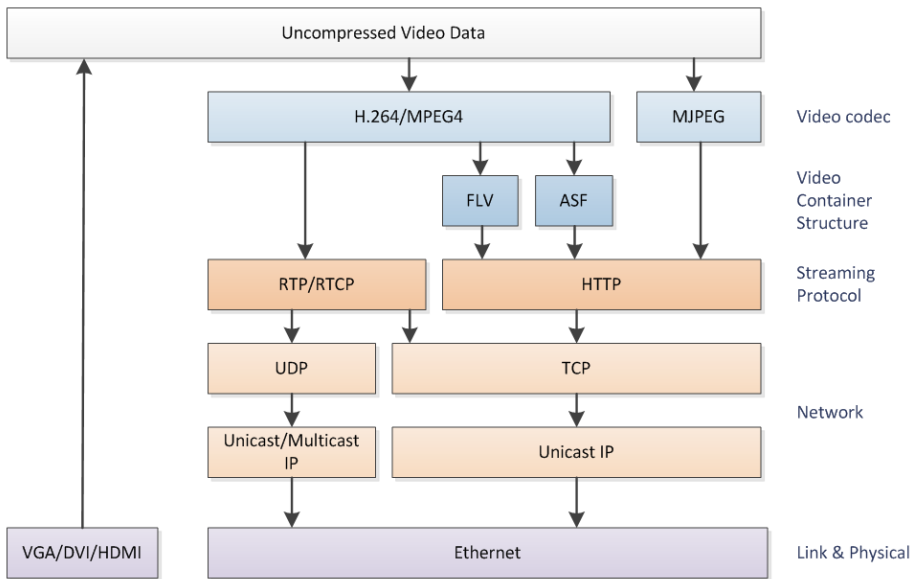

How the broadcast will be delivered to its viewers depends on the number of intended viewers and where the viewers are in relation to where the broadcast is originating. Are they on the same LAN or will they be accessing the broadcast from an external network? The answers to the above questions will help decide the delivery method of the broadcast.

The Lecture Recorder x2 can support streaming over HTTP, RTSP, peer-to-peer RTP connection, multicast RTP, MPEG-TS, and a Content Distribution Network (CDN) broadcast network. Each broadcast delivery method will be now discussed in more detail.

9.1 HTTP or RTSP Streaming

For HTTP or RTSP streaming the only information required to view the broadcast is the URL of the broadcast. The Lecture Recorder x2 is ready to go straight out of the box, without any additional settings. If your broadcast needs to be accessed by many clients, use a Content Distribution Network as explained in the **Using a Content Distribution Network** section.

9.2 Using a Content Distribution Network

A content delivery network (CDN) is a system of computers or servers that ingest an incoming stream source and rapidly provides this content to numerous users by duplicating the content on multiple servers and directing the content to users.


CDN distributes a heavy load of traffic to multiple locations in order to avoid congestion on a network that could impact a user's Internet experience. A CDN is highly scalable and can make financial sense to website owners as you will not need to pay for additional server hardware or routing should your website traffic start to increase or even decrease. The use of CDN technology has obvious advantages to those users whose broadcasts have large audiences from locations all over the world. If dozens or hundreds of viewers happen to select the same Web page or content simultaneously, the CDN sends the content to each of them without delay or time-out.

To stream to multiple users, the System can be configured as a client to CDN. Please click <http://epiphan.tv/cdn-partners.php> to view the list of CDN providers preferred by Epiphan. By connecting to a CDN server, the broadcast from the System can be streamed to multiple viewers. By using a CDN, the maximum number of concurrent clients is increased, while at the same time reducing the load on the uplink internet connection.

CDN streaming is a very effective approach when you are broadcasting streams from the Epiphan solutions and want to add scalability to your broadcast. The System features the Publish Stream functionality that enables you to stream the broadcast either via Epiphan's portal or CDN providers to multiple viewers. You must use the H.264 codec for CDN streaming.

Using CDN it is possible to set a user name and a password for the broadcast. Each viewer will have to request it from you before viewing the broadcast. This function allows you to manage access to your content ensuring visibility only to the appropriate and authorized viewers.

Figure 22 Using a CDN Service Increases Scalability of Concurrent Viewers

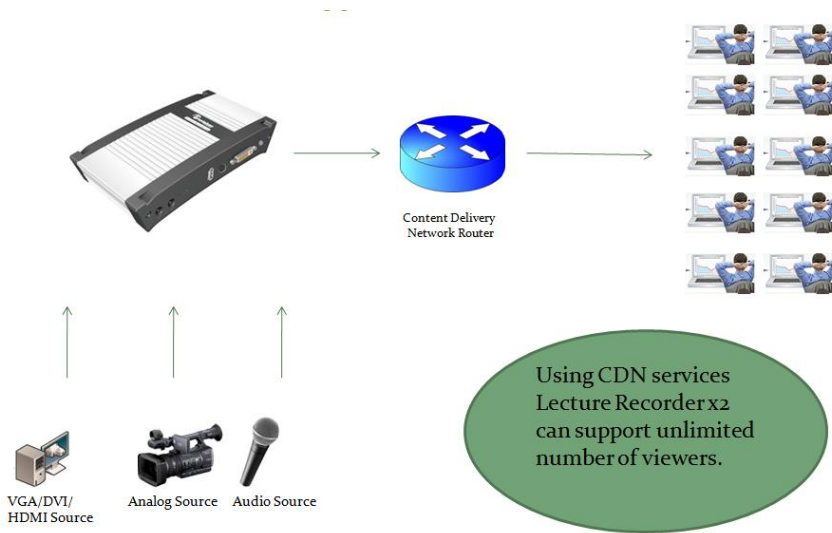

The Publish Stream functionality allows for directing captured video and audio to servers or clients using one of the available stream modes. The following options are available:

- **Disabled.** If this option is enabled, you cannot send multicast RTP stream, perform CDN broadcasting or stream video to Epiphan's portal.
- **to xxxxx.epiphan.tv.** This option allows for streaming video to the Epiphan's portal.
- **using RTSP announce.** This option allows for connecting to CDN server.
- **using RTP/UDP push.** This option allows for IP multicast broadcasting.
- **using MPEG-TS UDP push.** This option allows for IP multicast broadcasting of files in the MPEG-TS format in case when the UDP transportation protocol is used.
- **using MPEG-TS RTP/UDP push.** This option allows for IP multicast broadcasting of files in the MPEG-TS format in case when the RTP/UDP transportation protocol is used.

All options and settings to be performed are discussed further.

In the **Independent Channel Stream** mode it is not possible to publish both input sources using any of the Publish Stream options. Whether you need to send multicast RTP stream or publish video through CDN, it can be done only for the DVI input source.

The Publish Stream functionality is available only for the H.264 video codec.

9.2.1 *Using Epiphan.tv Portal for Streaming*

To set up and perform streaming via Epiphan.tv portal:

1. Click the Publish Stream option in the main menu of the control interface.
2. Select **to xxxxx.epiphan.tv** from the **Publish** drop-down list where xxxxx is the unique serial number of the Lecture Recorder x2.
3. Select **Enable publishing** and click Apply. The system informs you that stream will be available on the Epiphan's portal and provides a link.

Figure 23 URL to Epiphan Server

Publish Stream

Publish:

Stream from this device will be available on 92185.epiphan.tv

4. Click this link and access the portal where the stream is being broadcast in a new window.
5. In case you have selected a codec other than H.264 for streaming (MPEG4 or Motion JPEG), the system will give you a warning (see Figure 24 System Message in Case of Excessive Bitrate Speed). Click on **fix by setting H.264 codec**. The codec will be set to H.264 automatically.
6. In case the bitrate of your broadcast exceeds 500 kbit/s, the system will give you a warning (see Figure 24 System Message in Case of Excessive Bitrate Speed). Click on **fix by reducing bitrate to 500 kbit/s**. The bitrate will be set to 500 kbit/s automatically.

Note: Epiphan.tv is a demonstration service to help customers experiment with publishing streams to content distribution networks. Therefore certain bandwidth and performance limits are applied. To upgrade to a full service please select one of Epiphan's CDN partners.

Figure 24 System Message in Case of Excessive Bitrate Speed

Publish Stream

Publish: to 92026.epiphan.tv

⚠ Only H.264 video can be published fix by setting H.264 codec

⚠ Current video bitrate **2000 kbit** is too high for publishing on epiphan.tv (500 kbit/s max) fix by reducing bitrate to 500 kbit/s

Figure 25 System Message after Setting H.264 codec and Reducing Bitrate

Publish Stream

Publish: to 92026.epiphan.tv

⚠ Only H.264 video can be published — will be fixed by setting H.264 codec

⚠ Current video bitrate **2000 kbit** is too high for publishing on epiphan.tv (500 kbit/s max) — will be fixed by reducing bitrate to 500 kbit/s

Now connection through the media tunnel is established. The Lecture Recorder x2 starts streaming to the Epiphan's portal – **epiphan.tv**.

It is required to set up audio format as **MP3** when streaming through the epiphan.tv. This setting is performed in the control interface's Stream Setup section (see Select Audio Format).

There are several buttons available at the bottom of the epiphan.tv portal page (see Figure 26 Epiphan's Portal):

Switch to	Click this button to select a plugin which will be used for viewing the stream. Refer to Figure 27 Plugins Available for Selection on the Portal. The following plugins are available: - Flash RTMP - Flash HTTP - QuickTime - VLC Player
Embed	Displays a code that allows you to embed video stream into your web page. Refer to Figure 28 Code for Stream Embedding.
Direct URL	Displays a list of URLs for different types of broadcasting. Refer to Figure 29 Listing of Direct URLs.

7. Click **Switch to** button and select a plugin for viewing the stream.
8. If you need to embed the stream into your web page, click **Embed** to obtain the code.
9. Click **Direct URL** to obtain the list of URLs for different types of broadcasting.

Figure 26 Epiphan's Portal



Figure 27 Plugins Available for Selection on the Portal

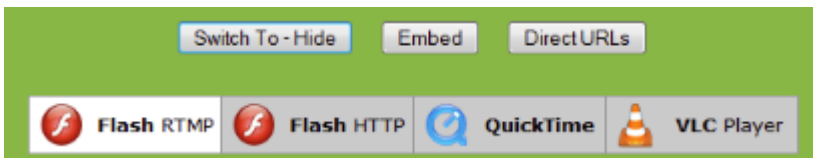
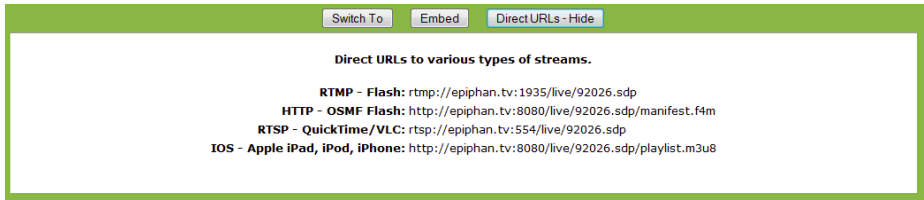
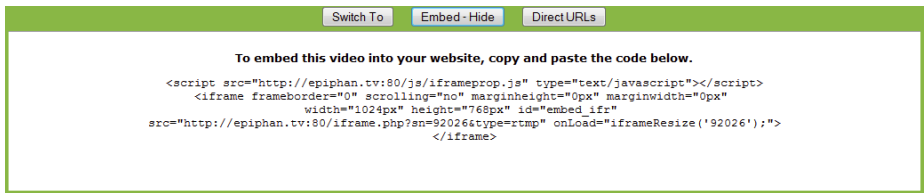


Figure 28 Code for Stream Embedding*Figure 29 Listing of Direct URLs*

Alternatively you can configure Lecture Recorder x2 to stream their content through epiphany.tv directly on the portal.

To view the stream directly on the portal:

1. Type <http://epiphany.tv> in the address bar of your browser.
2. Enter serial number of Lecture Recorder x2. It is displayed in the Info section of the Web admin interface.
3. Click the **Go!** button.

9.2.2 Using Epiphany's Partners as CDN Providers for Streaming

Use this option if you need to perform streaming on a remote streaming server other than **epiphany.tv**. Please contact CDN support to request the list of supported audio codecs and perform the required setting in the control interface's Stream Setup section.

To use this option:

1. Select **RTSP Announce** from the drop-down list.

2. Enter the host/server name. For example, **172.20.1.50**.
3. Enter the number of port which is used for streaming to server. Usually for RTSP streaming it is port 554.
4. In the **Mount point** field enter the full path to locate an SDP file on server. This path is provided by the CDN provider.
5. The RTSP protocol uses UDP or TCP as transport layers. If your CDN service requires TCP as a transport layer, select the **Use TCP for RTP stream** check box.
6. If necessary, enter the user and password information.
7. Click **Apply**.

Figure 30 RTSP Announce Functionality

Publish Stream

Publish: using RTSP announce ▼

Host:

Port:

Mount point:

☐ Use TCP for RTP stream

Username:

Password:

9.2.3 *Setting up Multicast from Publish Stream*

A multicast RTP stream provides a one-to-many broadcasting framework. In a multicast RTP configuration, the Lecture Recorder x2 sends a packet only once to a router that supports multicasting. This router then distributes the packets to all intended viewer nodes using a multicast protocol.

A multicast address is associated with a group of interested receivers. In IPv4, addresses 224.0.0.0 through 239.255.255.255 (the former Class D addresses) are designated as multicast addresses.

Sending multicast streams requires equipment that supports multi-casting, configuring your network and enabling specific multicasting features on the Lecture Recorder x2. Multicast architectures are used predominantly within a high bandwidth corporate LAN and not on Internet based architectures. Multicast RTP streaming is not usually propagated outside the LAN though it may be propagated through VPNs connecting several LANs. Multicast transmission is available during RTP streaming.

In the **Independent Channel Stream** mode it is not possible to set up multicast for streaming video from both sources. You are able to operate only the stream coming from the DVI input. The system provides a URL only for this stream even if the sources are connected to both DVI and S-Video inputs.

RTP/UDP Push streaming allows you to direct video to a server or client and generates an SDP file containing the stream description. SDP files can be stored on a streaming server, or opened by video players.

To use this option:

1. Select Publish Stream from the main menu.
2. Select **using RTP/UDP Push** from the drop-down list.
3. Enter a destination multicast IP address. At this target point the broadcast will be viewed.
4. Specify the numbers of the video and audio ports where the broadcast will be received.
5. Click **Apply**.
6. An SDP file is now generated. It is available in the **Info** section of the Web Admin interface. You can either save an SDP file on your local machine or provide the link to SDP file to your audience.

Figure 31 RTP/UDP Push Functionality

Publish Stream

Publish:

Destination IP:

Audio port:

Video port:

9.2.3.1 RTP/UDP Push streaming for the MPEG-TS file format

The Web interface allows you to set up the MPEG-TS stream using **MPEG-TS for RTP/UDP Push** and **MPEG-TS for UDP Push** options. These options are used, for example, when you need to add a VGADVI Recorder's stream to an IP TV or set-top box' playlist.

To use the RTP/UDP Push streaming, you must configure the following streaming settings in the Web Admin interface:

Video codec	H.264
Audio codec	MP3 or AAC

Using the first of these options it is possible to configure RTP/UDP transporting for the MPEG-TS stream.

To use this option:

1. Select Publish Stream from the main menu.
2. Select **using MPEG-TS for RTP/UDP Push** from the drop-down list.
3. Enter a destination multicast IP address. At this target point the broadcast will be viewed.
4. Specify the number of the destination port where the broadcast will be received.
5. Click **Apply**.

Figure 32 MPEG-TS UDP Push Functionality

Publish Stream

Publish:

Destination IP:

Destination port:

To view the stream you need a link: `rtp://@ip:port` (for example, `rtp://@226.63.45.23:6000`).

To get the link for the stream, select the Info section of the Web admin interface and view the Stream Info pane.

9.2.3.2 UDP Push streaming for the MPEG-TS file format

To configure UDP transporting for the MPEG-TS stream, select **using MPEG-TS for UDP Push** from the drop-down list.

To use the UDP Push streaming, you must configure the following streaming settings in the Web Admin interface:

Video codec	H.264
Audio codec	MP3 or AAC

To use this option:

1. Select Publish Stream from the main menu.
2. Select **using MPEG-TS for UDP Push** from the drop-down list.
3. Enter a destination multicast IP address. At this target point the broadcast will be viewed.
4. Specify the number of the destination port where the broadcast will be received.
5. Click **Apply**.

Figure 33 MPEG-TS RTP/UDP Push Functionality

Publish Stream

Publish:

Destination IP:

Destination port:

To view the stream you need a link: `udp://@ip:port` (for example, `rtp://@226.63.45.23:6000`).

To get the link for the stream, select the Info section of the Web admin interface and view the Stream Info pane.

9.3 UPnP

The VGADVI Recorder supports a set of networking protocols named **Universal Plug and Play (UPnP)**. It allows you to discover a presence of the functioning VGADVI Recorder on the network using a device such as media player connected to a TV set. Once the VGADVI Recorder is connected to a network, it automatically establishes working configuration with the media player and can share the data stream.

To use the UPnP functionality, you must configure the following file and streaming settings in the Web Admin interface:

Video codec	H.264
Audio codec	MP3 or AAC. Alternatively you may configure UPnP without selecting any audio codec.
File type	MPEG-TS – to obtain access to the files recorded earlier.


This functionality is enabled in the **UPnP** section of the Web Admin interface. The media player identifies the VGADVI Recorder as a media server. In the explanations below the UPnP settings are illustrated by the example of the media player Asus O!Play.

To establish UPnP connection:

1. Set up the VGADVI Recorder and start streaming/recording.
Make sure the viewer password is not set up.

2. If necessary, in the **UPnP** section use the **Server** field to name the media server (VGADVI Recorder).
You can use the following characters: A-Z, a-z, 0-9, _, ., :, @, ^, #, -, {, }, [,] , (,).
3. In the **UPnP** section select the **Share live video through UPnP** checkbox if you want to share live video streaming only.
4. Select the **Share recorded files through UPnP** checkbox if you want to share recorded files only.
If none of these check boxes is selected, the media server will not be displayed on the local network.
5. Connect your media player to your TV set.
6. Power on the media player and select the UPnP option in the player's interface.

Figure 34 UPnP Option in the Media Player's Interface

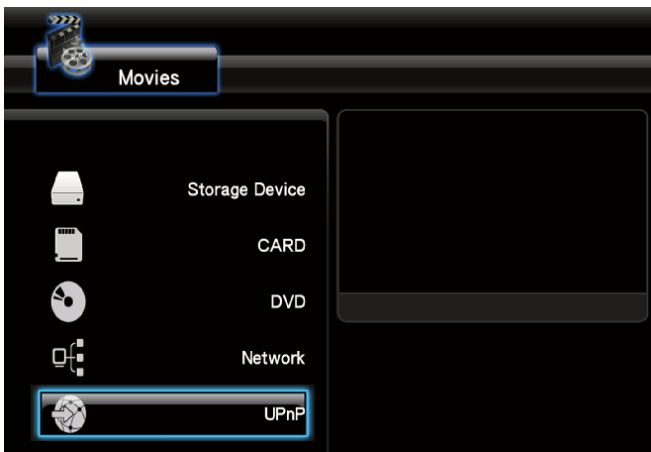

7. Select the media server.
The media player displays either Live Streams or Recorded Files folder depending on settings (see steps 3 and 4). In case both check boxes were selected, both folders will be visible.

Figure 35 Live Streams and Recorded Files Folders

8. Select the folder and the required stream or recorded file. All files are sorted by date (Last 24 hours, last month, last week, older).


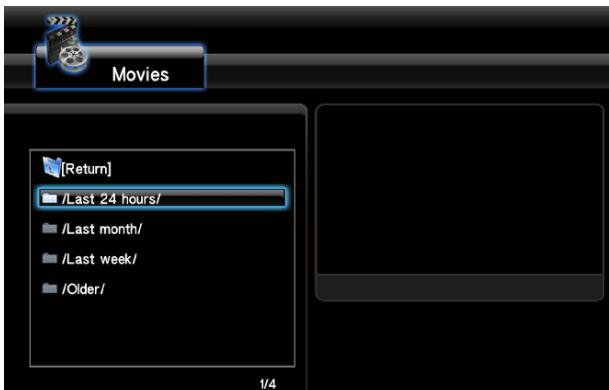
Figure 36 Sorted Files in the Folders

Figure 37 Selecting Live Stream

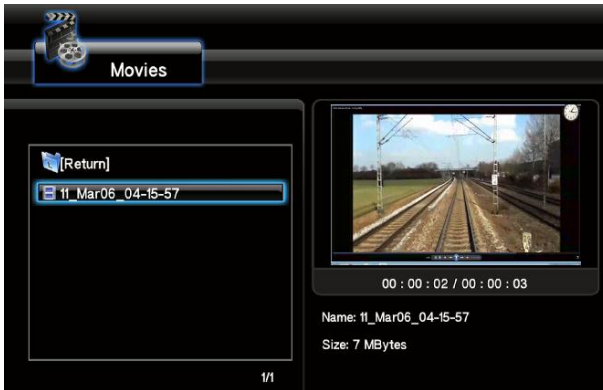

9.4 Viewing Streaming Video

The Lecture Recorder x2 may capture audio and video at resolutions up to 1920 x 1200. The resolution of the broadcast may exceed this value, for example, in case of analog video broadcasting.

Viewers can access the broadcasted video streams with a web browser that supports Motion JPEG, MPEG4 or Flash Video/H.264 compression or with a media player that is compatible with the stream format being transmitted. The available video stream formats is determined by selected video codec. Audio is available for all formats except from Motion JPEG.

9.4.1 Retrieving the Stream's URL for Broadcasting

In order for viewers to log in and view a stream, the administrator must release the URL(s) of the stream. The administrator is able to provide separate URLs for the stream coming in from the Lecture Recorder x2 video input ports and audio input ports. Alternatively, one URL can be provided that includes all the streams from all input sources. The administrator can retrieve the appropriate stream URL or URLs as explained below.

9.4.2 Using the Web Admin Interface's Info Page

The following indicates where each URL for the broadcast can be found on that page:

Live broadcast is the URL for the simultaneous broadcast from both video sources and the one audio port. If the **Single Channel Stream** mode is enabled (see **User Viewing Experience: Single Channel Stream vs. Independent Streams**), this URL is

used to view video from both DVI and S-Video inputs. The Live View button (see the section **Using the Web Admin Interface's Live View Feature**) performs the same action.

URLs for the broadcast coming from the DVI port are named as shown below:

`http:// (or rtsp://)***.***.***.***.***/stream.***`

URLs for the broadcast coming from the S-Video port are named as shown below:

`http:// (or rtsp://)***.***.***.***.***/stream_video.***`

URL for the broadcast coming from the DVI port (in case you accessed the device through serial discovery as explained in Access through Service Discovery):

`http:// (or rtsp://)<s/n>.local:***/stream_video.***` where s/n is the serial number of the device

URL for the broadcast coming from the S-Video port (in case you accessed the device through serial discovery as explained in Access through Service Discovery):

`http:// (or rtsp://)<s/n>.local:***/stream.***` where s/n is the serial number of the device

If you selected the **Motion JPEG** codec (see the Select Video Codec section), the following information is displayed:

Snapshot `http://***.*/image.jpg`

The incoming analog signal's type, S-Video or composite, is determined automatically and displayed. This URL is displayed only if the **Independent streams** mode is enabled.

See an example below.

Figure 38 URLs of the Broadcast Displayed in the Stream Info Section

Stream info

Live broadcast: <http://92033.local/preview.cgi>

Video: H.264 1920x1080@25 5.00 Mbps

Audio: AAC 44kHz stereo 192 kbps

Total: 5.19 Mbps

Actual encoder frame rate: 25.0

RTSP stream: <rtsp://92033.local:554/stream.sdp>

MPEG-TS stream: <http://92033.local:1881/stream.ts>

ASF stream: <http://92033.local:1881/stream.asf>

Flash stream: <http://92033.local:1881/stream.flv>

Composite: H.264 640x480@25 1.00 Mbps

Actual video channel encoder frame rate: 12.6

RTSP stream: rtsp://92033.local:554/stream_video.sdp

MPEG-TS stream: http://92033.local:1881/stream_video.ts

ASF stream: http://92033.local:1881/stream_video.asf

Flash stream: http://92033.local:1881/stream_video.flv

9.4.3 Using the Web Admin Interface's Live View Feature

The second method for retrieving the desired broadcast URLs is to use the Web Admin interface's Live View Feature. This feature not only shows the current broadcast to the administrator but also provides the broadcast URLs. By clicking on the **Live View** button from the main menu, a preview of the current broadcast's videos appear in the web browser. Under each of the broadcast screens the system displays the URL of that broadcast. For an example refer to the following figure:

Figure 39 A Broadcast with its URL Displayed Under the Broadcast Image



9.5 Viewing a Broadcast with a Browser

If the administrator has configured a viewer password, participants must obtain the password in order to log in. The administrator will also provide the IP Address or the URL to be used by the viewer's browser.

To log in to view the broadcast using a browser:

1. Start any web browser.
2. Browse to the IP address of the Lecture Recorder x2's broadcast stream.
For example, if the IP address of the Lecture Recorder x2's broadcast is **172.20.1.33**, then browse to: **http:// 172.20.1.33**
3. Enter the following:
User Name: **viewer**
Password: (enter the viewer password).
4. Press Enter.
5. The broadcast begins to play within the viewer's browser.



To log in to view a stream using a media player:

- 60

9.7 Compatibility Information

This section provides information on compatibility of video streaming formats and player which is necessary for streaming video.

The Lecture Recorder x2 can stream video using Flash (H.264), ASF (MPEG4 or H.264 codecs), Motion JPEG or RTSP (MPEG4 or H.264 codecs). A quick definition of these video streaming methods and the type of application that a viewer would use to watch that particular video stream is now provided.

The **Adobe Flash Video stream type** is proprietary but is supported on most web browsers and on many media players including the VLC Media Player. This file type supports the H.264 standard. This video supports analog audio from an external source.

The **Advanced System Format (ASF) stream type** also called Advanced Streaming format, can be viewed with the Windows Media Player or the VLC Media Player. Additional codecs may need to be installed to view ASF files. This file type supports H.264 and MPEG4 standards. This video supports analog audio from an external source.

The **Motion JPEG stream type** records each frame in the video in JPEG format and can be viewed using most web browsers. This video format does not support analog audio from an external source.

The **RTSP type** supports many media players including QuickTime and MPlayer. This file type supports H.264 and MPEG4 standards. This video supports analog audio from an external source.

MPEG-TS is a standard format for transmission and storage of [audio](#), [video](#), and [Program and System Information Protocol](#) (PSIP) data. It is used in broadcast systems such as [DVB](#), [ATSC](#) and [IPTV](#). It supports such media players as MPlayer, VLC Media Player, KMPlayer,

The following table displays the compatibility between the video/audio codecs and the file formats during data streaming.

Video codec selected	Audio codec selected	RTSP	FLV	ASF	MPEG-TS	MJPEG
H.264	No audio codec	+	+	+	+	-
H.264	LPCM	+	+	+	-	-
H.264	G.711	+	-	+	-	-
H.264	MP3	+	+	+	+	-
H.264	AAC	+	+	+	+	-
MPEG-4	No audio codec	+	-	+	-	-
MPEG-4	LPCM	+	-	+	-	-
MPEG-4	G.711	+	-	+	-	-
MPEG-4	MP3	+	-	+	-	-
MPEG-4	AAC	+	-	+	-	-
MJPEG	No audio codec	-	-	-	-	+

The following table displays the compatibility between the video/audio codecs and the file formats during data recording.

Video	Audio	AVI	MOV	MPEG-TS
H.264	No audio codec	+	+	+
H.264	LPCM	+	+	-
H.264	G.711	+	+	-
H.264	MP3	+	+	+
H.264	AAC	+	+	+
MPEG-4	No audio codec	+	+	-
MPEG-4	LPCM	+	+	-
MPEG-4	G.711	+	+	-
MPEG-4	MP3	+	+	-
MPEG-4	AAC	+	+	-
MJPEG	No audio codec	-	-	-

10 Recording

The Lecture Recorder x2 captures video and audio data which can be encapsulated in a file or files and recorded.

The Web admin interface provides the administrator and operator users with the ability to start, stop and configure the recording. Additionally, recorded video files might need to be downloaded or copied to another device for archiving purposes; also they might need to be deleted in order to manage disk space on the Lecture Recorder x2. For organizing, recorded video files may need to be renamed. All of these management tasks are available via the Lecture Recorder x2's Web admin Interface.

10.1 User Viewing Experience: Single Channel Stream vs. Independent Streams

Streaming and recording of all synchronized input sources can be performed in either of the following modes:

Single Channel Stream

Both video sources are combined into one and streamed to a common URL. Both video tracks and the audio track are combined and recorded to one video track and one audio track. The viewer is enabled to watch two different video sources at the same time and specify whether both streams are superimposed or not.

To enable Single Channel Stream Mode:

1. Select the Stream Setup menu option.
2. Select the **Enable video channel** check box.
3. Select either Video inside DVI/VGA or Video outside DVI/VGA radio buttons (**Picture-in-picture layout** field) in the Video channel pane.

Independent Channel Stream

In this mode each video source is streamed to a distinct URL. Both video tracks and the audio track are recorded to a multi-track file. Independent streams can be viewed in the separate windows of a browser or a media player. In this mode

you should select the H.264 codec with Video encoding profile set as Main or High.

In this mode you are unable to publish both streams using the Publish Stream function. Also note that in this mode only a URL for the broadcast coming from the DVI input can be used for publish streaming.

To decide which mode to select you need to know how you will use the Lecture Recorder x2. For example, the **Single Channel Stream** mode is ideal to deliver presentation material while the narrator is giving his comments. It is an effective way to create movies in sign language. As for the **Independent Channel Stream** mode, it is appropriate when a viewer does not need to watch both video streams simultaneously.

If you are streaming both video sources and an audio source using this mode, note that audio will be available with a DVI/VGA stream only.

To enable Independent Channel Stream Mode:

1. Select the Stream Setup menu option.
2. Select the **Enable video channel** check box.
3. Select the **Independent streams** radio button (**Picture-in-picture layout** field).

10.2 Selecting Recording File Format

The format of the record is specified using the **Recorded Files** button of the Web admin interface.

Figure 41 Select Recording Format

Recorded Files

Time limit:

Size limit:

File type:

Filename prefix:

☐ Stop recording in the absence of VGA/DVI and video signals

	File Name	Start	End	Duration	File Size	
Mar 13	 VGA_Mar13_08-07-14.ts 	08:07:14	08:07:29	15 seconds	8.03 MB	

Mar 7	 VGA_Mar07_06-34-04.ts 	06:34:04	06:35:39	1m 35s	50.68 MB	
	 VGA_Mar07_06-32-30.ts 	06:32:30	06:34:04	1m 34s	50.66 MB	

	 VGA_Mar07_04-35-17.mov 	04:35:17	04:36:08	51 seconds	26.28 MB	

	 VGA_Mar07_04-33-39.mov 	04:33:39	04:34:51	1m 12s	40.79 MB	
	 VGA_Mar07_04-32-05.mov 	04:32:05	04:33:38	1m 33s	50.30 MB	
Download Selected Delete Selected Delete All						

1. Use the **File Type** drop-down list to select the recording format. The following file formats are available:
 - **MOV**
 - **AVI**
 - **MPEG-TS**
2. Click **Apply**.

10.3 Changing Time and Size Limits

The Lecture Recorder x2 can record the channel to one or more files according to time and file size limit parameters. It will automatically create and start recording to a new file whenever either limit is reached.

To specify the time and file size limit parameters:

1. Click the **change** command.
2. Select the parameters values from the drop-down list (see Figure 42 Changing Time Limit and Size Limit).

Figure 42 Changing Time Limit and Size Limit

Recorded Files

Time limit:

Size limit:

File type:

☐ Stop recording in the absence of VGA/DVI and video signals

- Click **Apply**.

Table 11 Time and file size limit parameters

Time limit	Specify the maximum amount of time to record to a file. When either the time limit or the size limit is exceeded, the system starts recording data to a new file.
Size limit	Specify the maximum size of the recorded file. When either the time limit or the size limit is exceeded, the system starts recording data to a new file.

10.4 Selecting File Prefix

You can specify a prefix to the recorded file names. All recorded files will start with this prefix. If you have not specified any prefix, the system will use a prefix VGA by default.

To select a prefix:

- Click the **Recorded Files** button of the Web admin interface.
- Specify the prefix in the **Filename prefix** field.
You can use the following characters: A-Z, a-z, 0-9, _, #, -, [], ().
- Click **Apply**.


The next file you will record after clicking Apply will have the new prefix you specified.

10.5 Starting and Stopping Recording

The recorder status is shown in the Web Admin interface. It is located on the left hand side of the screen above the Web Admin interface's main menu. The ability to manage a recording with the Web Admin interface is done using these buttons.

Note that the format of the recorded file is specified clicking the **Recorded Files** button and selecting the required **File Type** value.

Figure 43 Recorder Status

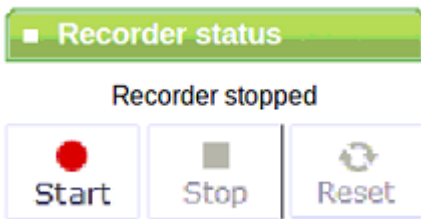

To start a recording, click the **Start** button in the Recorder status section of the main menu.

To stop a recording, click the **Stop** button in the Recorder status section of the main menu.

To close the file being recorded and start recording to a new file, click the **Reset** button. Or, alternatively click **Stop** and click the **Start** button again.

It is possible to specify whether the recording is stopped in case there is no signal. To enable this parameter, click the **Recorded Files** button of the Web admin interface and select the **Stop recording in the absence of VGA/DVI and video signals** check box.

Note that in case both signals are streamed via DVI and video ports, recording will be stopped only if streaming through both ports is interrupted. If either video signal is continued, recording will be continued too.

Select **Live View** from the Web Admin Interface's main menu. A preview of the broadcast that is currently being recorded appears in the web browser. The preview is exactly the same as what is being recorded.

Figure 44 Broadcasts Coming from Two Input Sources (Independent Streams Mode)



68

10.8 Recorded Files

The Recorded Files section lists all of the video files recorded by the Lecture Recorder x2 and that are saved on it. It is accessed by clicking the **Recorded Files** button from the Web admin interface's main menu.

If the signals are captured from two input sources, both streams are overlaid during recording. Therefore both input sources will be recorded to one file.

For each file, the list includes the name of the file, start and end times, duration, and size in MB. Each recording file listing also includes icons that can be used to download, delete, or rename the file.

Figure 45 Recorded Files

Recorded Files

Recording in **MOV** files with file limits: **45 minutes** and **2 GB**. Filename prefix is **Room #4** ([change](#))

	File Name	Start	End	Duration	File Size	
Mar 14	Room #4_Mar14_08-58-15.mov	08:58:15	09:14:47	16m 32s	555.55 MB	

Mar 13	☐ VGA_Mar13_08-07-14.ts 	08:07:14	08:07:29	15 seconds	8.03 MB	

Mar 7	☐ VGA_Mar07_06-34-04.ts 	06:34:04	06:35:39	1m 35s	50.68 MB	
	☐ VGA_Mar07_06-32-30.ts 	06:32:30	06:34:04	1m 34s	50.66 MB	

	☐ VGA_Mar07_04-35-17.mov 	04:35:17	04:36:08	51 seconds	26.28 MB	

	☐ VGA_Mar07_04-33-39.mov 	04:33:39	04:34:51	1m 12s	40.79 MB	
	☐ VGA_Mar07_04-32-05.mov 	04:32:05	04:33:38	1m 33s	50.30 MB	
Download Selected Delete Selected Delete All						

10.8.1 Downloading Recordings

Download recordings to either save or view them. Also you can download a single file or multiple files as a single .zip file.

1. Click **Recorded Files**.

2. Click the file you want to download. To download multiple files, select the checkboxes beside all of them and then select the **Download Selected** button at the bottom of the file list.
3. Follow the instructions to download the file or files.

If you select the **Download Selected** button, all of the files that you have selected are downloaded in a single zip file. You must unzip this file to view the individual video files.

If you have downloaded multiple files, select **Continue** to return to the previous page.

10.8.2 *Deleting Files*

The administrator and operator users can delete files from the Lecture Recorder x2 to free up space on the solid state memory. Files can be selected one at a time, or multiple files can be selected to be deleted. Alternatively there is a **Delete All** button that allows deleting all files that have been previously downloaded. This can be a time-consuming operation.

1. Click **Recorded Files**.
2. To delete individual recordings, select the **Delete File** icon  beside the file you want to delete. To delete multiple files, select the checkbox beside the files you want to delete and then select **Delete Selected**.
3. Follow the instructions to delete the file or files. The files are deleted from the solid state memory.

10.8.3 *Renaming Files*

The administrator and operator users can rename one file at a time. Again, this function is done by going to the **Recorded Files** section from the Web admin interface main menu.

To rename a file:

1. Click **Recorded Files**.
2. Select the rename file icon .

3. Enter the new name for the file.
4. Select **Submit**.

10.8.4 *Viewing Completed Recording Files*

As broadcasts are being recorded into the file, they can be viewed using the Live View button in the Web Admin interface. Closed recordings can be viewed using a compatible media player.

The instructions below explain how to view a closed recording file using the default media player installed on a computer. These instructions will only work when using the default player. To view a closed recording file using another player the closed file will need to be downloaded or copied to a location that is accessible by the player. The recorded file will then be opened from within the player itself.

1. Once the recording is completed, log into the Web Admin interface.
2. Click **Recorded Files** in the main menu and click the file that is to be viewed.
3. The system will suggest you to open the file with the computer's configured default player. For example, for systems running Windows, the default player is the Windows Media Player.
4. The player opens the window with the recording. If you have recorded streams from the two sources in the Independent Stream mode (see **User Viewing Experience: Single Channel Stream vs. Independent Streams mode**), the player will display them in separate windows. If you have recorded streams from the two sources in the **Single Channel Stream** mode, the player will display both streams in one common window.

10.8.5 *Viewing Recorded Snapshots*

When you take a snapshot using a URL displayed in the Info section (see Using the Web Admin Interface's Info Page), this recorded snapshot is added to the list of the recordings in the Recorded Files section.

10.9 File Transfer of Recorded Files

The Lecture Recorder x2 provides several options to automatically copy recordings to a network storage location, or a USB flash drive. This is a great feature for professional AV service providers that want to provide a copy of the presentation to the speaker before they leave the presentation venue.

10.9.1 Copying Recorded Files to a USB Flash Drive

The Lecture Recorder x2 is equipped with USB ports that can be used to copy recorded data from the Lecture Recorder x2 to an external USB flash drive formatted with one partition in one of the following file systems: FAT32, ext3, ext2, ISO 9660, HFS. This is a great feature for professional AV service providers that want to provide a copy of the presentation to the speaker before they leave the presentation venue.

Figure 46 A USB Flash Drive Connected to a USB port Receives Recorded Data



A flash drive can be connected to the Lecture Recorder x2 any time. Stick a flash drive into a USB port on the device and press lightly. The stick fits into the port only one way. After inserting, the Lecture Recorder x2 will recognize the stick, however, this occurs without any user notification whatsoever.

Figure 47 Insert a USB Flash Disk

The Lecture Recorder x2 copies to the inserted USB flash drive, only files recorded before inserting the flash drive, starting from the oldest record to the newest. The flash drive's LED (if any) will be blinking indicating data transfer. The Lecture Recorder x2 can copy maximum 100 recorded files to the flash drive. If you are making new recordings during copying data to the flash drive, these new recordings will not be copied.

Due to speed limitations flash drives are not capable of recording data on the fly. This means that while the previously recorded data captured by the Lecture Recorder x2 on its internal solid state memory will be copied to the flash drive, the currently opened recording file cannot be copied until the file is closed. Once closed, it is then available for copying.

Once the data has been copied, safely remove the flash drive. To check its free storage, files that have been copied and their size, insert the drive into a computer and see its properties.

10.10 Automatic File Upload

The automatic file upload feature will automatically copy recorded video files from the Lecture Recorder x2 to another device on your network. This feature's page is reached from the Web admin interface's main menu by clicking on **Automatic File Upload**.

By uploading recorded broadcast files to another network device, these broadcasts become available to be viewed from other device besides the Lecture Recorder x2. This feature also provides a method of automatically archiving recorded broadcast files after they are closed.

Note that the files that are currently being copied to another device on your network, have an extension **.part**. The image below is a screenshot from the user's PC. There is a folder where the files are being copied from the Lecture Recorder x2. Copying is enabled. One file with the extension **.part** is now being copied from Lecture Recorder x2.

Figure 48 The File is Being Copied Now

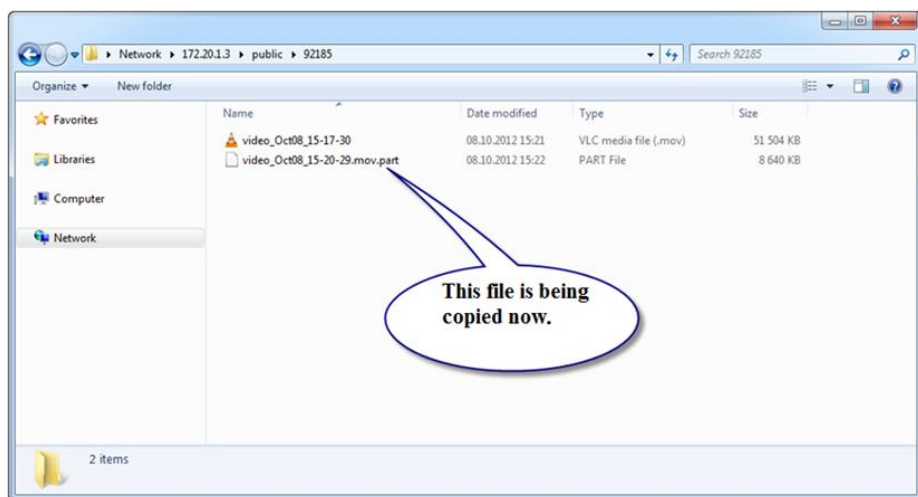


Table 12 Automatic File Upload Configurable Options

Enable Automatic File Upload	Check this box to enable this feature, uncheck this box to disable this feature.
Protocol	Select the upload client.
How often	Select how often video files are to be uploaded. By selecting On file rotation , the Lecture Recorder x2 uploads each video file after it stops recording the current video file and starts recording the next one. You can also configure the Lecture Recorder x2 to upload all video files every 1, 6, 12, or 24 hours.
Remote path	The path on the upload server to upload the video files to. This path must match an actual path on the server. If a path is not entered, the files are uploaded to the root location.
Remove after upload	If you select this checkbox, the video files will be deleted on Lecture Recorder x2 after uploading. In case the check box is not selected, the system check if there is enough place for a new file based on the size limit value (please refer to Changing Time and Size Limits). If there is not enough place, the system deletes the oldest files.
Mark file as downloaded	Select the checkbox to keep the files on Lecture Recorder x2 after uploading copies to the server. The filenames before uploading are displayed in blue. The filenames after uploading are displayed in purple.
Show log of automatic file upload	Use this command to display the log of file uploads

Figure 49 Configuring the Automatic File Upload Feature

Automatic File Upload

☒ Enable Automatic File Upload

Protocol:

How often:

Remote path:

☐ Remove after upload

☒ Mark file as downloaded

[Show log of automatic file upload](#)

10.10.1 Configuring Automatic File uploads

Recorded files can be uploaded to a CIFS server (a Windows share), an RSync server, or an FTP server.

1. Select **Enable Automatic File Upload**.
2. Set **Protocol** to *FTP Client*, *RSync Client*, or *CIFS client* depending on what upload server is being used.
3. If the **How often** option is set to *On file rotation*, the Lecture Recorder x2 will upload each video file after it stops recording to it. Alternatively, the Lecture Recorder x2 can be set to upload all video files every 1, 6, 12, or 24 hours.
4. Set **Remote Path** to the path on the upload server to upload the video files to. This path must match an actual path on the server. If a path is not provided, the files are uploaded to the root location.
5. Select the **Remove after upload** checkbox to delete all video files on the Lecture Recorder x2 after uploading them.
6. Select **Mark file as downloaded** to keep the files on the Lecture Recorder x2 device after uploading copies to the server. The filenames before uploading are displayed in blue. The filenames after uploading are displayed in purple.

Note: In case you select both checkboxes (**Remove after upload** and **Mark file as downloaded**) the files uploaded to server will be removed from the device.

7. Configure the appropriate client for the designated upload server:

- If the upload server is a CIFS server (for example, a Windows shared folder), select and configure the CIFS Client. See **Configuring a CIFS Client**.
- If the upload server is an RSync server, select and configure the RSync client. See **Configuring an RSync Client**.
- If the upload server is an FTP server, select and configure the FTP Client. See **Configuring an FTP Client**.

8. Click **Apply**.

The first copy is made after the time period set in **how often** expires. For example, if the Lecture Recorder x2 is set to upload files every hour, the first set of files is uploaded after one hour. If five video files are saved in the first hour, those five video files are uploaded. One hour later, all of the video files saved since the start of that hour are uploaded.

Video files saved before you selected **Apply** are not uploaded. For files saved before Automatic File upload is configured, a manual upload process will have to be done.

10.10.2 *Configuring a CIFS Client*

Use the CIFS client configuration to have the Lecture Recorder x2 device behave as a CIFS client connecting to a CIFS server (such as a Windows shared folder) when uploading broadcast files. Different networks may have different CIFS server configurations. If required, contact your network administrator for assistance with getting the Lecture Recorder x2 to connect to the server. Depending on your CIFS server configuration you may not have to enter information in every field shown in the following diagram.

Figure 50 Configuring a CIFS Client

CIFS Upload

Server port:	445
Server address:	172.20.1.102
Server share:	video
Domain:	company
Login:	user
Password:	•••••
	☒ Use temp file
	Apply

To configure the CIFS client:

1. Select *CIFS Client* in the **Protocol** field.
2. Enter the **Server port** if the CIFS server uses a non-standard port. If your CIFS server uses standard ports you should not have to add any information to this field. If your server uses non-standard ports or looks for a non-standard port first, enter the port number in this field.
3. Enter the **Server address**. This can be the numeric IP address or fully qualified domain name of the CIFS server.
4. Enter **Server share**. This is the CIFS share name or the name of the Windows shared folder on the CIFS server.
5. If required, enter the name of the CIFS **Domain**. The Domain can be a Windows Domain or Work Group name.
6. Enter the **Login** and **Password** required to authenticate with the CIFS server to connect to the server share.
7. Select the **Use temp file** check box to upload a temporary file. This prevents you from using a file which is not fully uploaded yet. After the file is uploaded, it is renamed to its original name.
8. Select **Apply**.


The Lecture Recorder x2 will then attempt to connect to the CIFS server. To view messages about whether the Lecture Recorder x2 is able to connect to the CIFS

server and the status of the connection, click **Show log of automatic file upload** (Figure 49 Configuring the Automatic File Upload Feature).

10.10.3 Configuring an RSync Client

Use the RSync client configuration to have the Lecture Recorder x2 act as an RSync client connecting to an RSync server. Different networks may have different Rsync server configurations. If required, contact your network administrator for assistance with getting the Lecture Recorder x2 to connect to the server.

Figure 51 Configuring an RSync Client

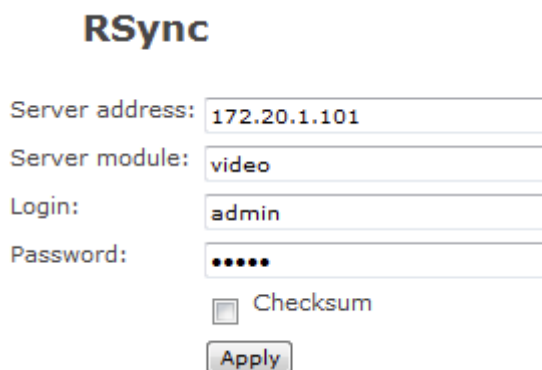

The image shows a web-based configuration form for an RSync client. At the top, the word "RSync" is displayed in a large, bold, blue font. Below it, there are four input fields: "Server address:" with the value "172.20.1.101", "Server module:" with the value "video", "Login:" with the value "admin", and "Password:" with five dots. Below the password field is a checkbox labeled "Checksum" which is currently unchecked. At the bottom of the form is a button labeled "Apply".

To configure the RSync client:


1. Select *RSync Client* in the **Protocol** field.
2. Enter the **Server address**.
3. Enter **Server module** which is a directory on the RSync server.
4. Enter the **Login** and **Password** required to authenticate with the RSync server to connect to the server share.
5. Select the **Checksum** checkbox to enable computing checksums algorithm applied during file synchronization between sender and recipient servers.
6. Select **Apply**.

The Lecture Recorder x2 will then attempt to connect to the RSync server. To view messages about whether the Lecture Recorder x2 is able to connect to the RSync server and the status of the connection, click **Show log of automatic file upload** (Figure 49 Configuring the Automatic File Upload Feature).

10.10.4 Configuring an FTP Client

Use the FTP client configuration to have the Lecture Recorder x2 act as an FTP client to an FTP server to upload broadcast files. Different networks may have different FTP server configurations. If required, contact your network administrator for assistance with getting the Lecture Recorder x2 to connect to the server.

Figure 52 Configure an FTP Client

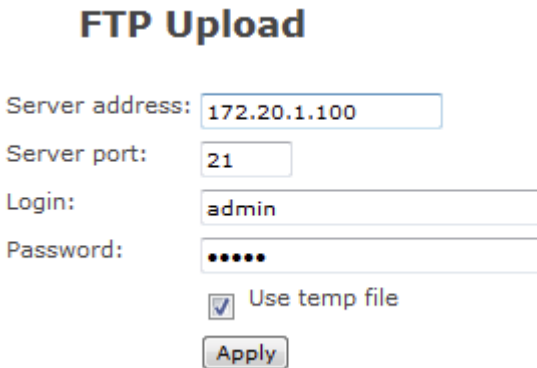

The screenshot shows a window titled "FTP Upload". It contains the following fields and controls:

- Server address:** A text box containing "172.20.1.100".
- Server port:** A text box containing "21".
- Login:** A text box containing "admin".
- Password:** A text box containing six dots "••••••".
- Use temp file:** A checked checkbox.
- Apply:** A button.

To configure the FTP client:

1. Select *FTP Client* in the **Protocol** field.
2. Enter the **Server port** if the FTP server uses a non-standard port. The standard FTP port is TCP 21.
3. Enter the **Server IP address**.
4. Enter the **Login** and **Password** required to authenticate with the FTP server to connect to the server.
5. Select the **Use temp file** check box to upload a temporary file. This prevents you from using a file which is not fully uploaded yet. After the file is uploaded, it is renamed to its original name.
6. Select **Apply**.

The Lecture Recorder x2 will then attempt to connect to the FTP server. To view messages about whether the Lecture Recorder x2 is able to connect to the FTP server and the status of the connection, click **Show log of automatic file upload** (Figure 49 Configuring the Automatic File Upload Feature).

10.10.5 *Testing the Automatic File Upload*

Test the automatic file upload to ensure all settings are correct.

To test automatic file upload:

1. Confirm that the upload server is operating.
2. Start recording the stream.
3. Log into the Web admin interface.
4. Select **Automatic File Upload**, from the main menu.
5. Set the **How Often** setting to *On file rotation*.
6. Click the **Reset** button in the main menu. The file currently being recorded will be closed and saved.
7. The recording will then be uploaded to the configured remote path using the configured client.
8. Check the server to confirm that the most recently saved video file has been uploaded to it and it is in the proper path location on that server.

If the file is not uploaded, click **Show log of automatic file upload** to view the log. Verify that the client configuration and Automatic File Upload configuration settings are correct. Check the remote device's root path, if the remote path is incorrectly configured, the broadcast file will be uploaded to that location.

Check the **Recorded Files** page from the Web admin interface.

If the **Remove after upload** checkbox is selected, the uploaded file should have been deleted from the Archive section.

10.11 FTP Server

An FTP server can be configured on the Lecture Recorder x2 to enable a FTP client to connect to the Lecture Recorder x2's internal solid state memory. An FTP client can be used to manually download video files from the Lecture Recorder x2. FTP access can also be given permission to delete video files remotely from the Lecture Recorder x2.

The FTP access options are accessible from the Web admin interface's main menu, **FTP Server**.

Figure 53 FTP Server Options

FTP Access Configuration

Enable FTP access ☐

FTP user name

admin ▼

**Enable FTP DELETE
command** ☐

Apply

Enable FTP Access	Enables FTP access to the Lecture Recorder x2.
FTP user name	Select one of the following users as the FTP client: • admin • operator • viewer
Enable FTP DELETE command	Select this option to grant the FTP client the ability to delete videos from the Lecture Recorder x2 internal memory.

11 Networking

11.1 Connecting Directly to the System

This section discusses how to directly connect to the Lecture Recorder x2 using the factory default network settings. This method must be used if the network where the Lecture Recorder x2 resides does not have a DHCP server, you have lost the correct network settings or it is desired to simply connect a capture workstation and the Lecture Recorder x2 without a router, by simply using a direct connect Ethernet cable.

The next section discusses tools that can be used to discover the Lecture Recorder x2 that has been plugged into the local network and been assigned an appropriate IP address for the given network by a DHCP server. This network discovery also applies if the device was assigned a static IP.

Either method, connecting directly or connecting using network discovery, is required to access the Lecture Recorder x2 to allow for further configuring of the device.

11.1.1 *Rescue Settings*

The Lecture Recorder x2 comes with the following static address settings:

IP: 192.168.255.250 (this special IP address is permanent to improve safety).

Netmask: 255.255.255.252

User Name: admin (no password)

For more information on the admin user, see the section **Configuring Administrator Access** .

11.1.2 *Connecting Directly to the Lecture Recorder x2*

Using the default network settings, perform the following steps:

1. Record the network settings of the workstation being used to connect to the Lecture Recorder x2 so that they can be restored later if needed.
2. Temporarily change the network configuration on the workstation to the following:
 - a. Static IP assignment
 - b. IP address: 192.168.255.249
 - c. Subnet mask: 255.255.255.252
3. Establish an Ethernet connection between the Lecture Recorder x2 and the workstation by one of the following methods:
 - a. Connect the Lecture Recorder x2's Ethernet port to the same Ethernet network as the workstation
 - b. Connect the Lecture Recorder x2's Ethernet port to an Ethernet network switch and connect the workstation's Ethernet to that same switch.
 - c. Connect the Lecture Recorder x2's Ethernet port directly to the workstation's Ethernet port using either a regular or a crossover Ethernet cable.
4. Start a web browser on the workstation and browse to:
<http://192.168.255.250/admin/>
5. Log in as the administrator user:
User Name: **admin**
Password:<return>
6. The Lecture Recorder x2's web admin interface opens. See the chapter, **Web Admin Interface**, for more details on using the Web admin Interface

to configure the Lecture Recorder x2.

7. Restore the previously save network configurations on the workstation.

11.2 Network Discovery of the Lecture Recorder x2

Instead of connecting directly as described in the previous section, to the Lecture Recorder x2, the Lecture Recorder x2 can be discovered on the network and its IP address can be obtained.

You can easily access the Lecture Recorder x2 in the network using service discovery tools. Please refer to **Access through Service Discovery** section.

When the Lecture Recorder x2 device is configured for DHCP and has been plugged into a network with a DHCP server, the DHCP server automatically assigns an IP address to the Lecture Recorder x2 relevant to the network. Determining the IP address assigned to the Lecture Recorder x2 is required to access the Lecture Recorder x2 to allow for further configuring of the device.

There are tools that will return the Lecture Recorder x2's IP address. Epiphan provides two such tools and they are described in the following section.

Alternatively, contact the relevant network administrator to retrieve the Lecture Recorder x2's IP address.

Regardless of the method used to obtain the Lecture Recorder x2's IP address, its assigned IP address is required to allow for any further configuring.

11.2.1 *Epiphan's Network Discovery Utility*

Epiphan's Network Discovery Utility runs on a Windows based PC. It finds the Lecture Recorder x2 device on the network and displays its assigned IP address. The Network Discovery Utility can also be used to connect to the Lecture Recorder x2 Web admin interface tool.

11.2.1.1 *To install Epiphan's Network Discovery Utility Tool*

1. Find the latest Network Discovery Utility on the website's download page (<http://www.epiphan.com/downloads/>).
2. Select **Download Network Discovery Utility**. Ensure to note the download destination folder.

3. Run NetworkDiscovery.exe from the above noted download destination folder.
4. Select Search to find the Epiphan devices connected to the network.

The Network Discovery Utility can only find the Epiphan devices on the same network as the Windows PC that is running this utility.

11.2.2 *Epiphan's EpiphanTouch App for iPad, iPhone, iTouch*


EpiphanTouch™ is a discovery and remote control application available as a free download from iTunes and the App store.

EpiphanTouch finds, provides the IP address, and can be used as a remote control to start and stop broadcastings and recordings on the Lecture Recorder x2. It will list all Epiphan devices including the Lecture Recorder x2 operating on the same network as the iPhone, iTouch, or iPad that is running the EpiphanTouch application.

11.2.2.1 *To install and use EpiphanTouch from iTunes:*

1. Either follow the URL to go directly to the EpiphanTouch page in the App store: <http://itunes.apple.com/pk/app/epiphantouch/id424405619?mt=8#> or search for the EpiphanTouch application in the App Store using the **Search** field.

Figure 54 Search for EpiphanTouch in the App Store

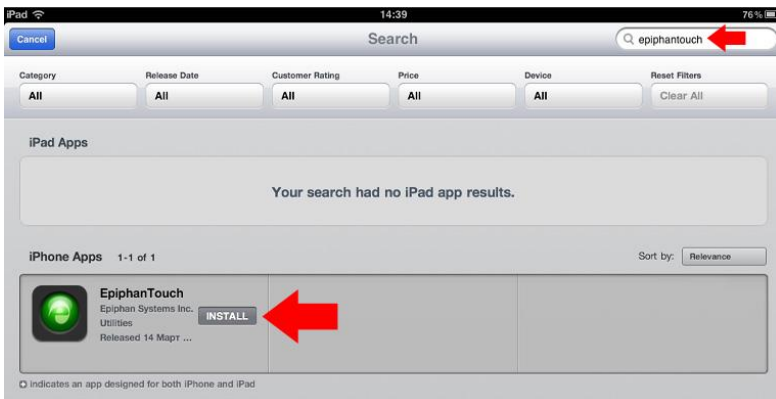

2. Install the EpiphanTouch App on your iDevice.

3. The EpiphanTouch will discover all Epiphan devices. The IP addresses of all devices will be displayed. Record the IP address corresponding to the Lecture Recorder x2 you want to configure. If there is more than one Epiphan device on the network, you can identify your Lecture Recorder x2 by the serial number displayed.
4. To use EpiphanTouch's remote control feature, select the desired Lecture Recorder x2 and log into the device as the administrator user. See section The Administrator User for more details about logging into the Lecture Recorder x2.

Figure 55 Log into the Lecture Recorder x2 as the Administrator



5. Start or stop video capturing and recording.

11.3 Setting IP Address

Changing the network configuration involves setting how the Lecture Recorder x2 receives an IP address. IP Addresses can be assigned statically or dynamically with the use of a DHCP server. For network configuration changes to take effect, the

Lecture Recorder x2 device must be rebooted after making the changes, refer to the section **Rebooting or Restarting Lecture Recorder x2**.

If the IP address is changed, the Lecture Recorder x2 must be removed from the Network Discovery Utility and then re-discovered by selecting **Search**.

Additionally, the Lecture Recorder x2's MAC address is displayed on the Network Configuration page. Providing the MAC address to your network administrator may be helpful for managing your network.

11.3.1 *Set the Lecture Recorder x2 to use a static IP address*

1. Log into the Web admin interface.
2. Select **Network** from the main menu.
3. Select **Use static address**.

Enter an IP Address, Network Mask, Default Gateway, and DNS Server that are valid for your network. Ensure that this gateway setting is the gateway of your local LAN, i.e. the local router. Contact your network administrator if you are not sure what information to use. The IP address, Network Mask, Default Gateway, and DNS Server assigned must be compatible with your network.

4. Select **Apply** to save these changes.
5. Select **Maintenance**.
6. Select **Reboot Now**.
7. It takes a few minutes for the Lecture Recorder x2 device to reboot.
8. After a few minutes log into the Web admin interface. Logging into the Web admin interface can be done by:
 - a. Using a browser and browsing to the new IP address assigned to the Lecture Recorder x2.
 - b. Using the Network Discovery Utility, see section **Logging into the Web Admin Interface** for more details.
9. Re-log into the Web admin interface using the administrator username and password.

11.3.2 *Set the Lecture Recorder x2 to use a DHCP server*

By default, the Lecture Recorder x2 is configured to connect to a network using a DHCP server, the DHCP server will automatically configure the network settings and assign a relevant IP address to the Lecture Recorder x2. This section describes how to re-enable DHCP settings if they have been disabled.

1. Log into the Web admin interface.
2. Select **Network** from the main menu.
3. Select **Use DHCP**.
4. If required, in the **MTU Size** field specify the largest packet size permitted for Internet transmission. If this value is too large for the connection, it may result in packet loss or dropping Internet connection.
5. The other fields can be left as is.
6. Select **Apply** to save these changes.
7. Select **Maintenance**.
8. Select **Reboot Now**. It takes a few minutes for the Lecture Recorder x2 device to reboot.
9. After a few minutes log into the Web admin interface. Logging into the Web admin interface can be done by:
 - a. See the section **Network Discovery of the Lecture Recorder x2** on how to obtain the IP address for Lecture Recorder x2
 - b. Using a browser and browsing to the new IP address assigned to the Lecture Recorder x2.
 - c. Using the Network Discovery Utility, see section **Logging into the Web Admin Interface** for more details.
10. Re-log into the Web admin interface using the administrator username and password.

The following diagram shows the network page from the Web admin interface and enabling DHCP.

Figure 56 Enabling DHCP

IP Configuration for eth0

MAC address is 00:55:56:0e:18:c1

Current IP address is 172.20.1.33

Use DHCP ☒

Use static address ☐

IP Address

Network Mask

Default Gateway

DNS Server

MTU Size

Apply

Network Diagnostics

Address:

ping

traceroute

11.3.3 Performing Network Diagnostics

A tool in the Network section of the web interface combines the functionality of the **traceroute** and **ping** programs in a single network diagnostic tool.

Traceroute is a computer network diagnostic tool for displaying the route or path and measuring transit delays of packets across an Internet Protocol (IP) network.

Ping is a computer network administration utility used to test the reachability of a host on an IP network and to measure the round-trip time for messages sent from the originating host to a destination computer.

This tool investigates the network connection between the host that the Lecture Recorder x2 runs on and a user-specified destination host. After entering the URL or

IP address, click either **ping** or **traceroute**. If ping is clicked, the tool determines the reachability of the user-specified host. If **traceroute** is clicked, the route and measures transit delays of packets is displayed. As it does this, the tool displays statistics about each machine.

Figure 57 Statistics displayed by the diagnostics tool after using the Ping utility

Network Diagnostics

Address:

```
# ping -w 10 -c 4 'epiphan.tv'
PING epiphan.tv (46.4.76.18): 56 data bytes=
64 bytes from 46.4.76.18: seq=0 ttl=54 time=68.216 ms=
64 bytes from 46.4.76.18: seq=1 ttl=54 time=84.821 ms=
64 bytes from 46.4.76.18: seq=2 ttl=54 time=67.758 ms=
64 bytes from 46.4.76.18: seq=3 ttl=54 time=67.338 ms=
=
--- epiphan.tv ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss=
round-trip min/avg/max = 67.338/72.033/84.821 ms=
```

Figure 58 Statistics displayed by the diagnostics tool after using the Traceroute utility

Network Diagnostics

Address:

```
# traceroute -q 1 -w 1 '10.6.65.254'
traceroute to 10.6.65.254 (10.6.65.254), 30 hops max, 38 byte packets=
1  172.20.1.1 (172.20.1.1)  1.155 ms=
2  10.6.65.254 (10.6.65.254)  2.638 ms=
```

12 System Administration

12.1 Setting the Date and Time

The date and time can be set manually or Time synchronization can be enabled on the Lecture Recorder x2. Configuring how the date and time is managed on the Lecture Recorder x2 is done by selecting **Date and Time** from the Web admin interface's main menu.

Clicking **Enable Time Synchronization** on the Date and Time page, results in the date and time being received from a public network time protocol (NTP) server. This is done by having the Lecture Recorder x2 connect to the server over the Internet. NTP uses UDP and port 123. The default NTP server is time.nrc.ca. This should be changed to a NTP server that is recommended for your location. This information should be available from your network administrator.

For more information about NTP, including a list of recommended NTP servers, refer to the following webpage: [The NTP Public Services Project](#).

To get the correct time from the NTP server, ensure that the correct Time Zone for the location of the Lecture Recorder x2 is selected.

If the Lecture Recorder x2 device cannot connect to the Internet and there is an RDATE server on the network, you can set time synchronization to use RDATE (as defined by [RFC 868](#)). Contact your network administrator for the address of the RDATE server and enter the RDATE server IP address into the Server IP Address field.

In both cases, how often the date and time is updated can be configured. The Time Update interval can be every 1, 6, 12, or 24 hours.

Figure 59 Setting the Date and Time

Date and Time

Time Zone

Enable time synchronization ☒

Protocol

Server IP Address

Update interval

Set time manually ☐

Date (yyyy-mm-dd)

Time (hh:mm:ss)

RTC calibration:

(-31..+31).
 Negative numbers slow the clock up to 5 sec/day, positive numbers speed up the clock up to 10 sec/day.

The following table summarizes the configurable options for setting the date and time.

Table 13 Date and Time Configurable Options

Time Zone	Select the appropriate time zone
Enable time synchronization	This parameter enables time synchronization with a NTP or RDATE server
Protocol	Select the time protocol

Server IP Address	Enter the IP address of the NTP or RDATE server
Update interval	Specify the frequency of time synchronization
Set time manually	This parameter enables manual time setting
Date (yyyy-mm-dd)	Specify the date
Time (hh:mm:ss)	Specify the time
RTC calibration: (-31..+31).	This field allows RTC calibration, the slowing or speeding the clock up to 10 sec/day. Negative numbers slow the clock down up to 5 seconds a day and positive numbers speed up the clock up to 5 seconds a day.

12.2 Configuring Administrator Access

Initial factory settings provide no password for the administrator user. For security reasons, a password to control access to the administration functions should be added.

The administrator user's password can be added or changed at any time in the **Access Passwords** section of the Web Admin interface.

If you lose or forget the admin password you can reset the device to its factory default setting. See **Restoring the Lecture Recorder x2 Default Factory Configuration** in order to reset the device to factory defaults.

12.2.1 *To add or change the Administrator password*

1. Log into the Web admin interface.
2. Select **Access Passwords**.
3. Enter the new password in the **New administrator password** field. The password is case sensitive and can include up to 255 ASCII characters.
4. Repeat the password using the **Retype administrator password** field.
5. Select **Apply**. The Web admin interface will log off the current administrator user.
6. When prompted, re-log into the Web admin interface with the admin user

name and the new password.

Figure 60 Adding or Changing the Administrator's Password

Administrator access

New administrator
password

Retype administrator
password

12.2.2 *Deleting the Administrator password*

The administrator password can be deleted if it is not required. However, by removing the administrator password, it makes it easier for unauthorized users to change the Lecture Recorder x2's configuration.

1. Log into the Web admin interface
2. Select **Access Passwords**.
3. Select **Apply** leaving the administrator password fields blank.
4. When prompted, re-log in leaving the password field blank.

12.3 Configuring Operator Access

An operator's role allows you to grant particular rights to some users. They are able to have access to the recorded files and can adjust frame grabber and audio settings. It is highly recommended to set a password for the operator's role.

12.3.1 *To add or change the Operator password*

1. Log into the Web admin interface.
2. Select **Access passwords**.
3. Enter the password in the **New operator password** field
4. Repeat the new password in the **Retype operator password** field. The password is case sensitive and can include up to 255 ASCII characters.
5. Select **Apply**.
6. Distribute or communicate the operator access password to authorized operators of the broadcast.

Figure 61 Changing the Operator password

Operator access

New operator password	
Retype operator password	

12.3.2 Delete the Operator Password

The operator password can be deleted if operators are not required to enter a password to access the broadcast.

1. Log into the Web admin interface.
2. Select **Access Passwords**. The password fields should be blank.
3. Select **Apply** without adding characters to the password fields. The password is deleted.

12.4 Configuring Viewer Access

Controlling viewer access to a broadcast can be done in two different ways. The first is to assign a password to the Lecture Recorder x2's viewer password and the second is to enable IP Address based authentication. By default the viewer user does not have a password to control access and no IP Address based authentication is enabled. Viewers have access only to Live View functionality in browser or direct streams in player.

Figure 62 Changing the Viewer Password

Viewer access

New viewer password	
Retype viewer password	

12.4.1 *To add or change the viewer password*

Used to add or change the password associated with the viewer user. The viewer access password is the same for all viewers until it is changed. Any viewer that knows the password will continue to have access until the password is changed. It is good practice to change the password each time there is a change in the users that should be authorized to access the broadcast. Please contact your network security administrator with respect to password management required for your applications.

Once a viewer password is configured, participants must obtain the current viewer password in order to log in. The user name is always the same: **viewer**. It cannot be changed. If the viewer password is changed during a broadcast, the broadcast is interrupted and all viewers will be required to re-log in using the new viewer password in order to continue receiving the broadcast. Depending on how the viewer is receiving the broadcast, this will involve clicking the refresh button in the viewer's browser or clicking on the play button in the viewer's media player.

1. Log into the Web admin interface.
2. Select **Viewer Access**.
3. Enter and repeat the new password. The password is case sensitive and can include up to 255 ASCII characters.
4. Select **Apply**.
5. Distribute or communicate the viewer access password to authorized viewers of the broadcast.

12.4.2 *Configuring IP-based Authentication for Viewers*

This function allows the option of providing access to the broadcast to a large number of users without having each individual user log in with the viewer username and password. This is done by configuring individual IP addresses or a range of IP addresses that are either granted access or denied access to the broadcast. Once set up, users can access the broadcast just by clicking on a supplied link. The administrator for the broadcast would continue to access the Web admin interface using the administrator user credentials to access all features.

Figure 63 IP-based Authentication

IP-based authentication:

Deny IP's:

Allow IP's:

If any addresses are specified in the **Allow IP's** field, access to the broadcast will be allowed only for these addresses.

If any addresses are specified in the **Deny IP's** field, access to the broadcast will be forbidden for these addresses and allowed for all other addresses.

The list of allowed IP addresses must be specified in the Allow IP's field. All addresses not specified in this field will be considered as denied. The list of denied IP addresses has a higher priority over the list of allowed IP addresses in case of their intersection. An example of how this is implemented would be the following:

1. In the **Allow IP's** field enter **172.20.1.22, 172.20.1.33**.
2. In the **Deny IP's** field enter **172.20.1.20-172.20.1.30**.

Access to the broadcast will be forbidden for the entire subset of addresses - **172.20.1.20-30**.

The set of users must have a fixed IP address or a range of IP addresses through which they connect to the internet. Individual computers may have dynamic server-assigned addresses but as long as they use a gateway with a static address to access the internet, this feature can be configured

IP authentication is primarily about convenience, rather than extra security. The level of security is comparable with that of a password-based authentication. Bear in mind that anyone who has access to a computer within the specified range will be able to access the broadcast without having to provide log in credentials. Also it is probably not possible to restrict access to a single computer since in most networks a number of computers share a single gateway to the internet.

The table below shows the fields used in configuring IP-based authentication for viewers.

Deny IP's	Enter individual IP addresses separated by a comma or a range of IP addresses that are denied access to the broadcast. To specify a range of addresses, use a hyphen (-). Example 1: 172.20.1.20, 172.20.1.32 Example 2: 172.20.1.1-100
Allow IP's	Enter individual IP addresses separated by a comma or a subset of IP addresses that are granted access to the broadcast. To specify a range

of addresses, use a hyphen (-).

12.4.3 *Delete the Viewer Password*

The viewer password can be deleted if viewers are not required to enter a password to access the broadcast. If you want to use the UPnP functionality, do not enter any viewer password.

1. Log into the Web admin interface.
2. Select **Viewer Access**. The password fields should be blank.
3. Select **Apply** without adding characters to the password fields. The password is deleted.

12.5 Upgrading the System Firmware

Epiphan releases new firmware version to fix known problems or to add new features. When available, new firmware version can be obtained from Epiphan Support.

Updating firmware can take several minutes. Once a firmware upgrade is started, the Lecture Recorder x2 cannot broadcast or record streams until the firmware upgrade is complete.

When you upgrade the existing firmware, the administrator's password and the operator's password as well as all other settings are preserved.

12.5.1 *Installing new firmware*

Do not interrupt or power down the Lecture Recorder x2 device during the firmware update.

1. Log into the Web admin interface.
2. Select **Firmware Upgrade** from the main menu.
3. Click the **Check for updates** command. The system will indicate whether any updates are available. If updates are available, select **Browse** and then select the downloaded firmware file.
4. Select **Apply**. The firmware file is uploaded to the Lecture Recorder x2. It then unpacks the firmware file, verifies the contents and then upgrades the firmware.

5. To complete the firmware upgrade you must reboot the Lecture Recorder x2. Refer to the section, **Rebooting or Restarting Lecture Recorder x2**.
6. Log into the Web admin interface and confirm that the Lecture Recorder x2 is now running the new firmware version by selecting **Info** from the main menu and by viewing the firmware version.

Should the firmware update fail, restore to the default factory configuration. Refer to the section **Restoring the Lecture Recorder x2 Default Factory Configuration**.

Figure 64 Firmware Upgrade

Firmware Upgrade

Current firmware version: "2.4.0e" ([check for updates](#))

Select firmware upgrade
file

DO NOT interrupt or power down the VGADVI Broadcaster until after the update is completed.

12.6 Maintenance Controls

From the Web admin interface's main menu, select **Maintenance** to perform operations such as restoring the factory configuration, and rebooting the Lecture Recorder x2.

Figure 65 Maintenance Options

Maintenance

Enable remote support ☒

Enable connection to maintenance server ☒

Maintenance server

Server Address

Server Port

Apply

Backup Current Configuration

Restore Configuration From File

Config file MUST be in plain text format.

Restore Factory Configuration

Reboot

12.6.1 Restoring the Lecture Recorder x2 Default Factory Configuration

Select **Restore** beside Restore Factory Configuration to reset the stream and frame grabber settings back to the default factory configuration. The default factory configuration is the configuration that the Lecture Recorder x2 had when it was received from Epiphany. It can be useful to return the Lecture Recorder x2 to this configuration if a number of configuration changes have been made that need to be reversed.

Note that restoring default factory configuration also restores default network configuration (DHCP settings are enabled by default).

Pressing the Reset button on the Lecture Recorder x2 will also perform a reset to the default factory configuration. See the section, **System Hardware Features**, for information on the location of the reset button and the proper steps that need to be followed to perform a hardware based factory reset.

12.6.2 Rebooting or Restarting Lecture Recorder x2

Many Lecture Recorder x2 configuration changes require you to reboot the Lecture Recorder x2 in order to have these changes come into effect, the following outlines the steps to reboot the Lecture Recorder x2.

12.6.2.1 To reboot or restart the Lecture Recorder x2

1. Log into the Web admin interface.
2. Select **Maintenance**.
3. Beside **Reboot** select **Reboot now**.

The reboot process is not lengthy and once completed, the Lecture Recorder x2 will resume normal operation.

12.6.3 Backing up Current Configuration

Use this functionality to ensure that you have a backup version of your current configuration on your local machine. It is helpful, for example, when you need to set up multiple devices using the same parameters. Note that you should not store any passwords in the configuration file since it has plain text format and all passwords will be visible.

1. Log into the Web admin interface.
2. Select **Maintenance**.
3. Beside **Backup current configuration** select **Backup**.

12.6.4 Restoring Configuration from File

1. Select **Maintenance**.
2. Click **Browse** near **Restore configuration from file** and select the configuration file.
3. Click **Restore**.

12.6.5 Shutting down the Lecture Recorder x2

To shut down Lecture Recorder x2 you need to disconnect power. It is not possible to shut down the device from the Web Interface.

12.7 Lecture Recorder x2 System Information

To display the following system information, select **Info** from the Web admin interface's main menu:

1. The current firmware version, revision and date.
2. The services status.

3. The information about the broadcast characteristics, encoder's frame rate and the IP addresses of the broadcast in all possible formats. Please refer to **Using the Web Admin Interface's Info Page**.

Note: If you refer the device by its serial number as described in the Access through Service Discovery section, the IP address is not displayed.

4. Active connections.
5. Resolution of the connected video source and other VGA mode information.
6. The hardware platform information.

This page is also displayed when you first log into the Web admin interface.

Figure 66 Lecture Recorder x2 Information

Firmware

Version: 2.5.0a
Revision: 21122_1444
Date: 2013-03-11

Services status

Encoder: up 45 seconds
Broadcaster: up 48 seconds
Recorder: disabled

Stream info

Live broadcast: <http://92033.local/preview.cgi>

Video: H.264 1280x1024@25 5.00 Mbps
Audio: AAC 44kHz stereo 192 kbps
Total: 5.19 Mbps
Actual encoder frame rate: 25.0
RTSP stream: rtsp://92033.local:554/stream.sdp
MPEG-TS stream: http://92033.local:1881/stream.ts
ASF stream: http://92033.local:1881/stream.asf
Flash stream: http://92033.local:1881/stream.flv

Composite: H.264 640x480@25 1.00 Mbps
Actual video channel encoder frame rate: 25.0
RTSP stream: rtsp://92033.local:554/stream_video.sdp
MPEG-TS stream: http://92033.local:1881/stream_video.ts
ASF stream: http://92033.local:1881/stream_video.asf
Flash stream: http://92033.local:1881/stream_video.flv

Connections

No active connections

VGA mode

VGADVI: 1280 x 1024 @ 60100 mHz
Video: 720 x 480 @ 59940 mHz

32 03 1B 08 00 51
00 05 00 04 C4 EA 00 00 02 00 00 00
3A 01 4B 03 29 04 B4 00 29 00 80 02 00 04 4B 03 4B 03 00

Hardware

gioconda

13 Serial Port Configuring

The Lecture Recorder x2 can be integrated with control equipment that uses an RS-232 interface. This RS-232 interface is used to trigger the device to perform various actions by sending a command over the RS-232 connection, refer to the RS-232 Commands chapter for more information about these commands.

To connect your control equipment to the Lecture Recorder x2, use a standard RS-232 null-modem cable. Then an RS-232 serial adapter is connected to the RS-232 null-modem cable before inserting it into one of the two USB ports on the Lecture Recorder x2.

The standard Lecture Recorder x2 package does not include an RS-232 serial adapter but one can be purchased from Epiphan as an optional accessory.

Flow control is the only configurable item for this feature. This is done by navigating to the Serial Port section of the Web admin interface.

Table 14 *Configuring the Serial Port Feature*

Flow control	Flow control means the ability to slow down the flow of bytes in a wire. For serial ports this means the ability to stop and then restart the flow without any loss of bytes. Specify by what means this control will be performed: • Hardware • Software • None
--------------	---

Figure 67 Configuring the Serial Port Feature

Serial port setup

Fixed configuration

- **Speed: 19200**
- **Parity: none**
- **Stop bit: 1**

Flow control

Hardware ▼

Apply

14 Customizing Presentation and Web Content

This feature allows the customizing of the viewer's Web browser's display of the broadcast. For example, the event's name, company logos and other pertinent data can be displayed to the viewer. Note that this feature affects only viewers who are connecting to the broadcast via Live View (please refer to **Using the Web Admin Interface's Live View Feature**).

To use this option, select **Branding** from the Web admin interface's main menu.

To customize the design you need to create an .xsl file using XML document formatting. The creation of this file is beyond the scope of this document.

Figure 68 Customizing Web Content

Templates

- ☒ [default.xsl](#)
- ☐ [default_pro.xsl](#) [Remove](#)
- Apply

Other files

Upload files/templates

File/template to upload:

The table below outlines how to select and upload the necessary files to customize the viewing browser.

Table 15 Web Content Configurable Options

Templates	Available template files are displayed. To select a template, click a radio button near its name. Then click Apply .
Other files	Files that were uploaded and used during template creation are displayed.
Upload files/templates	Browse to the template or file you need to upload and click Upload.

15 Stream Branding

In the Stream Branding section of the Web Admin interface you can customize the broadcast and specify the information that is displayed to a viewer without creating an .xsl file.

The upper pane of this section allows you to specify content metadata. Media player pulls this information and displays it to a viewer. Metadata provides the following important information about the broadcast:

- **Title**
- **Author**
- **Copyright**
- **Comments**

In the middle pane (**Logo**) you can specify a logo that will be displayed over the broadcast. Previously you must upload the logo file using the Branding section. No transparent images are allowed.

To create a logo:

1. Select the **Branding** section of the Web Admin interface.
2. Upload the required files with logos using the **File/template to upload** field.
3. Select the **Stream Branding** section of the Web Admin interface.
4. Use the **Image** drop-down list to select the file with logo.
5. The logo can be positioned using the left top, right top, left bottom, right bottom values. Use the **Position** field to select the required value.
6. Specify the **left/right** and the **top/bottom** margins for the logo. The margins are calculated using the selected position as the starting point.

If you have specified the logo position details incorrectly (for example, only a part of the logo will be viewed according to the settings), the full image will be displayed anyway.

In the lower pane ("**No signal**" image) you can specify an image that displays when there is no signal detected. As in case with the logo file, you must previously upload the No signal file in the **Stream Branding** section.

Figure 69 Stream Branding

Stream Branding

Content metadata

Title:	
Author:	
Copyright:	
Comments:	

VGADVI channel logo

Image:



Position:

Left/Right margin:

Top/Bottom margin:

Video channel logo

Image:

Position:

Left/Right margin:

Top/Bottom margin:

"No signal" image

Image:

Use [Branding](#) page to upload or delete images

Figure 70 Video Stream with a Configured Logo

16 Configuring Remote Support

The Lecture Recorder x2 uses remote support settings to communicate with the Epiphan maintenance server. When enabled, communicating with the maintenance server allows Epiphan to review the device configuration, firmware version, and other basic operating parameters. If you contact Epiphan Support for help with the Lecture Recorder x2, the support team can use this maintenance information to help remotely troubleshoot the problem.

The Lecture Recorder x2 device does not send private information to the Epiphan maintenance server, just basic operation and configuration information. The amount of traffic sent to the Epiphan maintenance server is small and should not affect the network or Internet throughput.

By default, communication with the Epiphan maintenance server uses TCP port 30.

The default address of the Epiphan maintenance server is **epiphany.epiphan.com**.

The Lecture Recorder x2 must be able to find a DNS server to resolve the default address and then must be able to connect to this address on the Internet using TCP port 30. If the Lecture Recorder x2's network settings are set to use DHCP, it gets the address of the DNS server from the DHCP server. If network settings are set to use a

static IP address, the IP address of the DNS server must be entered. This IP address can be retrieved from your network administrator.

If you have a firewall or some other device protecting the network from the Internet and you would like to enable remote support, the configuration of this device may have to be changed for the Lecture Recorder x2 to connect to the Epiphan maintenance server. Contact your network administrator for assistance.

Remote support is enabled by default. Use the **Maintenance** section in the Web admin interface to access the remote support settings and refer to the following diagram and table for more details on how to configure this feature.

Figure 71 Remote Support Configuration

Maintenance

Enable remote support ☒

Enable connection to maintenance server ☒

Maintenance server

Server Address

epiphany.epiphan.com

Server Port

30

Apply

Table 16 Remote Configuration Options

Enable Remote Support	Allow Epiphan Support to log into the Lecture Recorder x2 with special access privileges to troubleshoot problems.
Enable connection to maintenance server	The Lecture Recorder x2 establishes an outgoing TCP connection to the Epiphan maintenance server using TCP port 30. Using this connection, the device sends information to the Epiphan maintenance server and Epiphan Support can use this connection to remotely log into the device.
Server Address	The address of the Epiphan maintenance server. This address is usually epiphany.epiphan.com . Only change this address if required, and only if recommended by Epiphan Support. For example, this might be changed to a numeric IP address if the Lecture Recorder x2 cannot connect to a DNS server.
Server Port	The Epiphan maintenance server’s port number.

You can enable and disable remote support and the connection to the maintenance server independently.

The following table describes the results of different configurations:

Table 17 *Different Results by enabling/disabling Remote Support and Connection to the Maintenance Server*

Enable Remote Support	Enable Connection to Maintenance Server	Result
Yes	Yes	The Lecture Recorder x2 connects to the Epiphan maintenance server. If required, Epiphan Support can remotely connect to the device with special access privileges.
No	Yes	The Lecture Recorder x2 connects to the Epiphan maintenance server. Epiphan Support can remotely connect to the Web admin interface with the same access privileges as an administrator.
Yes	No	The Lecture Recorder x2 does not connect to the Epiphan maintenance server. If required, Epiphan Support can remotely connect to the device with special access privileges. Contact Epiphan Support for assistance.

Please contact your network security administrator to review your security settings for the Lecture Recorder x2.

17 Disk Check

A disk maintenance schedule can be set up for checking the Lecture Recorder x2's hard disk for errors. The hard disk maintenance schedule includes running a disk check after either a configured number of device restarts or after a configured number of months of operation. This is configured on the Disk Check page which is opened by selecting **Disk Check** from the Web admin interface's main menu.

This page allows the number of the Recorder restarts before a disk check is to be performed and the number of months to lapse prior to a disk check to be configured. The system will trigger a disk check based on these values and based on whichever event occurs first. The actual disk check process will be run the next

time the Lecture Recorder x2 restarts. The disk check occurs during system startup and can cause a lengthy delay in starting up the device.

Alternatively on the same page, select **Check disk now** to immediately perform the disk check. Clicking this button causes the device to stop recording and to check the disk immediately. The disk check process can take a few minutes. The Lecture Recorder x2 automatically resumes recording after the disk check is complete. Results of the disk check are not displayed unless errors that cannot be corrected are found.

Figure 72 Configuring the Disk Maintenance Schedule

Disk maintenance

Disk maintenance schedule

Number of LectureRecorder restarts before disk check is forced. 0 means do not force disk check.	365
Number of months before disk check is forced on the next LectureRecorder restart. 0 means do not force disk check.	12
Save	

Check disk now

You can start disk check immediately. Recording will be stopped and resumed after the check is completed.

18 Disk Status Information

In the **Disk status** section of the Web admin interface's main menu, the total amount of space available on the Lecture Recorder x2's solid state memory in GB is listed. Additionally, the used and available space in GB, and the amount used as a percentage of the total amount of space on the disk is displayed for quick reference.

If the Lecture Recorder x2 is running low on disk space the administrator can delete files. The administrator can also configure automatic file uploads to keep the Lecture Recorder x2 from running out of disk space. The Lecture Recorder x2 stops recording if there is less disk space available than the amount required saving a broadcast file.

19 Configuring Using a Third-Party Application

The Lecture Recorder x2 can be configured and managed with the third-party applications or with a script that sends commands to the Lecture Recorder x2 as URLs. Please contact [Epiphan](#) for the most recent updates to the API.

This chapter describes:

- Serial port configuration;
- RS-232 commands;
- Syntax for HTTP API Commands;
- Keys for HTTP API Commands;
- and finally provides some examples.

19.1 Serial Port Configuration

The Lecture Recorder x2's serial port configuration has the following settings:

Parameter	Value
Speed	19200 bps
Data bits	8
Parity	None
Stop bits	1
Flow control	Hardware

19.2 RS-232 Commands

The Lecture Recorder x2 implements an RS-232 interface allowing for the easy integration with existing control room and board room equipment.

Some of the commands require channel name as an argument. Channel name should be separated from the command name by a period – “.”. Either a channel name or a channel index can be specified. An empty channel name can be provided for some commands. In this case this setting is interpreted as all channels. If more than one channel has the same name the command will apply only to one channel, so the channel index should be used instead.

Table 18 Serial Interface commands and Status Report commands and description

STOP.<channel>	Stop recording for the channel by setting <code>rec_enabled</code> to <code>""</code> . This has the same effect as <code>SET.<channel>.rec_enabled="" SAVECFG</code> .
STOP	Stop recording for all channels
START.<channel>	Start recording for the channel by setting <code>rec_enabled</code> to <code>"on"</code> . This has the same effect as <code>SET.<channel>.rec_enabled=on SAVECFG</code> .
START	Start recording on all channels
SNAPSHOT.<channel>	Take snapshot on the specified channel (must be MJPEG)
SNAPSHOT	Take snapshot on all channels (must be MJPEG)
GET.<channel>.<key>	Get value of a broadcasting parameter <key>. Please refer to section Broadcasting Setup Keys for details.
SET.<channel>.<key>=<value>	Set value of a broadcasting parameter. Parameter values containing spaces must be enclosed in quotation marks (either single or double). New values might not take effect immediately and will be lost after the reboot unless SAVECFG command is issued later.
SAVECFG	Save parameters values modified by SET command.
STATUS.<channel>	Report status of recording service for the channel. Status values are: "Running", "Stopped", "Uninitialized".
STATUS	Report status of recording service for all channels.
FREESPACE	Report free space on the data partition, in bytes.
RECTIME.<channel>	Report elapsed time for the current file being recorded.
RECTIME	Report elapsed time for the current recording file for all channels.

If any of the START commands are given while a recording is already in progress, the current recording will be stopped and a recording with the new settings will be started. The Lecture Recorder x2 periodically reports its status back using the following messages:

Status Line Value

```
RECTL STATUS {UP <time>|DOWN  
<time>|UNKNOWN}
```

Status of the recording

```
RECTL MICVOLUME <0-100> Level of line-in amplification (percents)  
RECTL PCMVOLUME <0-100> Level of line-out amplification (percents)
```

Each status line is terminated with an LF (ASCII code 10) character.

19.3 Retrieving a List of HTTP API Commands

You can easily retrieve the list of HTTP API commands available for the VGADVI Recorder. You only need to type in the following URL in the address bar of your browser:

http://device_ip/admin/http_api.cgi

where **device_ip** is an IP address of the VGADVI Recorder. This IP address can be obtained from the Network section of the Web admin interface.

19.4 Syntax for HTTP API Commands

Use the following syntax to get configuration settings:

http://<address>/admin/get_params.cgi?key

Use the following syntax to set or change the configuration:

http://<address>/admin/set_params.cgi?key=value

In this example **<address>** is the IP address or name you use to connect to the System admin interface.

E.g., if you log into the Lecture Recorder x2's Web admin interface using <http://192.30.23.45/admin>, then **<address>** would be 192.30.23.45.

Key is the name of the object of the Lecture Recorder x2 to be viewed or changed. See the next section for more information on the valid values for **key**.

Value is the value to be set. Some values include spaces, for example, the frame size can be 1024 x 768. Use %20 for spaces, for example:
framesize=1024%20x%201068

You can include multiple <key>or <key>=<value>statements in one URL. Separate the statements with &.

For example:

- To get the product name and firmware version:
`http://<address>/admin/get_params.cgi?product_name&firmware_version`
- To set the stream type to ASF and bit rate to 256000:
`http://<address>/admin/set_params.cgi?streamtype=2&vbitrate=256K`

For third party applications like wget, you should always include the admin username and password to change the Lecture Recorder x2 configuration. The syntax for using wget to enter URLs is:

```
wget --http-user=admin --http-passwd="<passwd>" http://<address>/admin/get_params.cgi?<key>[&<key>]..."
wget --http-user=admin --http-passwd="<passwd>" http://<address>/admin/set_params.cgi?<key>=<value>[&<key>=<value>]...
```

19.5 Keys for HTTP API Commands

This section lists and describes all of the keys that can be used in HTTP API commands to view or change the Lecture Recorder x2 configuration. These keys are broken into the following types:

- Device Info Keys
- Broadcasting Setup Keys
- ASF Encoder Keys
- RTP Unicast Keys

19.6 Device Info Keys

These keys are used for getting information about the device.

Table 19 Device Information Keys

Key	Description
vendor	Name of a vendor. The value is always "Epiphan Systems"

	Inc.”
product name	Name of a product.
firmware_version	Firmware version.
mac_address	MAC address.

19.7 Broadcasting Setup Keys

These keys are used for getting or setting the broadcasting setup.

Table 20 Broadcasting Setup Keys

Key	Description
framesize	Get or change the frame size in pixels, for example 1024 x 768. Use %20 for spaces.
htmlrefresh	Get or change the Flash/MJPEG webpage page refresh time in seconds. The range is 0 to inf (infinite). 0 means that page will not refresh.
streamport	Get or change the stream port number. The range is 1000 to 65535. You cannot use port 5557 because this port is used for network discovery.
streamtype	Get or change the stream type: • 0 - Flash • 1 - Flash+H.264 • 2 - ASF • 3 - ASF+H.264 • 4 - MJPEG • 5 – RTSP
vbitrate	Get or change the video bit rate in kbit/s, for example vbitrate=65536. You can use short forms such as vbitrate=64K and vbitrate=1M.
bcast_disabled	Possible values are 'on' or empty. Broadcasting will be disabled if the value is 'on'.
audio	Possible values are 'on' or empty. Enables broadcasting of audio signal.
usenotsignal	Possible values are 'on' or empty. Displays “No signal” image if the signal is off.

vbufmode	Use this key to define compression level of the broadcast. E.g., in the Strong mode the broadcast parameter strictly correspond to the specified bitrate. Select the level: • Relaxed • Balanced • Strong
fastvideo	Enables fast video. Possible values are 'on' or empty
timelabel	Enables time labeling functionality. Possible values: • 'none' • 'date' • 'hms' • 'date_hms' • 'hms_ms' • 'date_hms_ms'
vgopsize	Minimum interval between key frames.
fpslimit	Video frame rate limit.

19.8 ASF Encoder Keys

These keys are used for getting or setting ASF encoder settings. You can change ASF encoder settings when stream type is set to ASF stream.

Table 21 ASF Encoder Keys

Key	Description
title	Add a title for the video being broadcast. Use %20 for spaces.
author	Add the name of the author of the video being broadcast. Use %20 for spaces.
copyright	Add copyright information for the video being broadcast. Use %20 for spaces.
comment	Add a title for the video being broadcast. Use %20 for spaces.

19.9 RTP Unicast Keys

These keys are used for getting or setting RTP unicast settings. You can change these settings when stream type is set to RTP.

Table 22 RTP Unicast Keys

Key	Description
unicast_enabled	Enable RTP unicast. Possible values are 'on' or empty.
unicast_address	Get or change the unicast address.
unicast_aport	Get or change the unicast a port.
unicast_vport	Get or change the unicast v port.

19.10 Recorder Keys

These keys are used to enable or disable the recording of a broadcast.

Table 23 Recorder Keys

Key	Description
rec_enabled	Enables recording functionality. Possible values are 'on' or empty.

19.11 Examples

For a Lecture Recorder x2 device with an IP address of 192.30.23.45, and admin password of pass123, one can use wget to do the following:

- Enter the following command to view the broadcasting stream type and frame size:

```
wget --http-user=admin --http-passwd=pass123
"http://192.30.23.45/admin/get_params.cgi?streamtype&framesize"
```
- Enter the following command to set the broadcasting stream type to ASF, add the title "Lecture Recorder x2 Stream", and enable recording audio.

```
wget --http-user=admin --http-passwd=pass123
"http://192.30.23.45/admin/set_params.cgi?streamtype=2
&title= Lecture Recorder x2 %20Stream&audio=on"
```

20 Sample Configurations

This chapter describes video and audio parameters recommended for performing slides and video recording from PC, Mac and iPad.

PC with video

Codec	H.264 codec
Video encoding preset	High Speed
Video encoding profile	Main
Enhanced compatibility mode (h.264 slicing for RTP)	OFF
Key frame interval	2 sec
Limit frame rate	30
Bitrate	2000 kbits for ~ HD; 4000 kbits for ~ Full HD
Rate control mode	Low delay
Audio format	PCM 44 kHz
Audio channels	Stereo

Mac with video

Codec	(H.264 codec
Video encoding preset	High Speed
Video encoding profile	Main
Enhanced compatibility mode (h.264 slicing for RTP)	ON
Key frame interval	2 sec
Limit frame rate	30
Bitrate	2000 kbits for ~ HD; 4000 kbits for ~ Full HD
Rate control mode	Low delay
Audio format	PCM 44 kHz
Audio channels	Stereo

PC with slides

Codec	H.264 codec
Video encoding preset	High Quality
Video encoding profile	High

Enhanced compatibility mode (h.264 slicing for RTP)	OFF
Key frame interval	2 sec
Limit frame rate	15
Bitrate	1000 kbits for ~ HD; 2000 kbits for ~ Full HD
Rate control mode	Storage
Audio format	PCM 44 kHz
Audio sample rate (Hz)	Stereo

Mac with slides

Codec	H.264
Video encoding preset	High Quality
Video encoding profile	High
Enhanced compatibility mode (h.264 slicing for RTP)	ON
Key frame interval	2 sec
Limit frame rate	15
Bitrate	1000 kbits for ~ HD; 2000 kbits for ~ Full HD
Rate control mode	Storage
Audio format	PCM 44 kHz
Audio sample rate (Hz)	Stereo

iPad with slides

Codec	Motion JPEG
Video encoding preset	High Quality
Limit frame rate	15
Quality parameter	80 — for MJPEG only

iPad with video

Codec	Motion JPEG
Video encoding preset	High Speed
Limit frame rate	30
Quality parameter	40 — for MJPEG only

The diagrams below illustrate how the FPS and bitrate parameters correlate at different resolutions during the broadcast. These diagrams may be useful if you need to select optimal FPS and bitrate values and avoid possible broadcast issues.

Figure 73 Correlation Between FPS and Bitrate Values at Resolution 1280x720

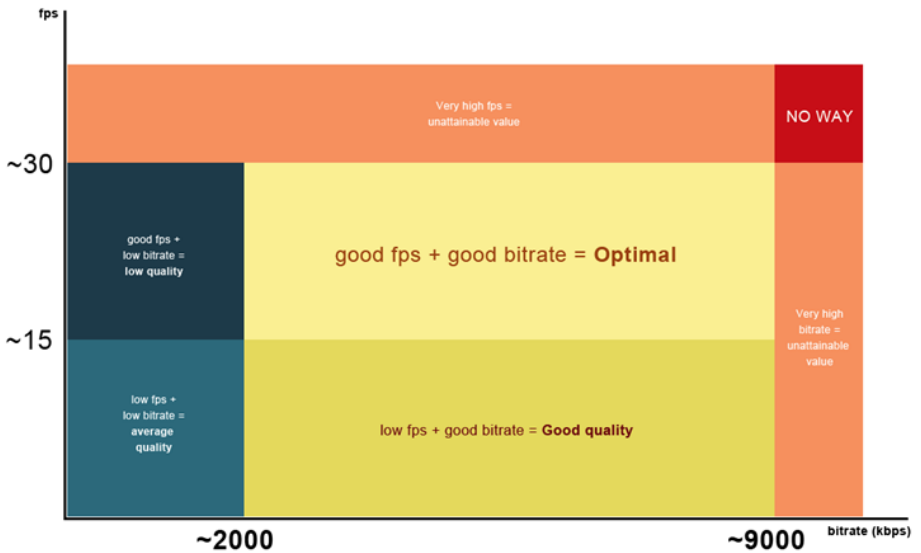


Figure 74 Correlation Between FPS and Bitrate Values at Resolution 1920x1080


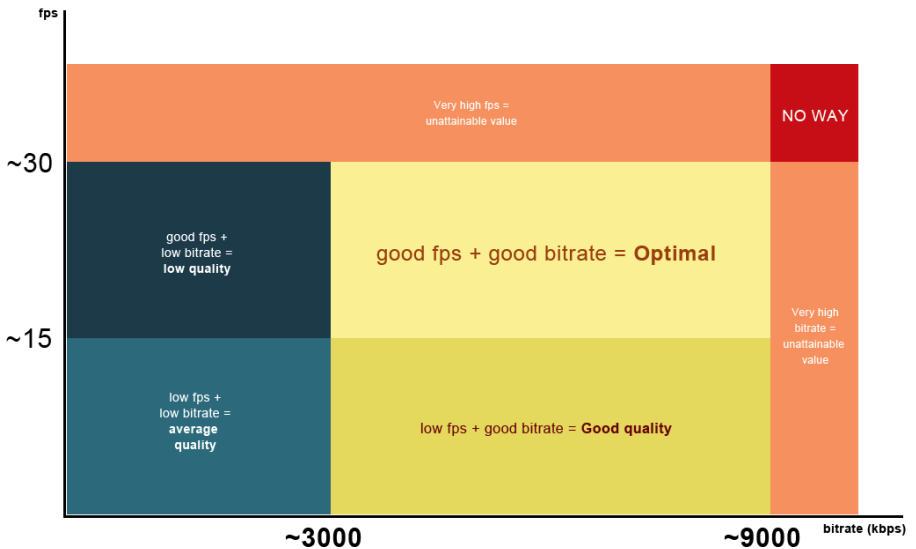


Figure 75 Correlation Between FPS and Bitrate Values at Resolution 640x480

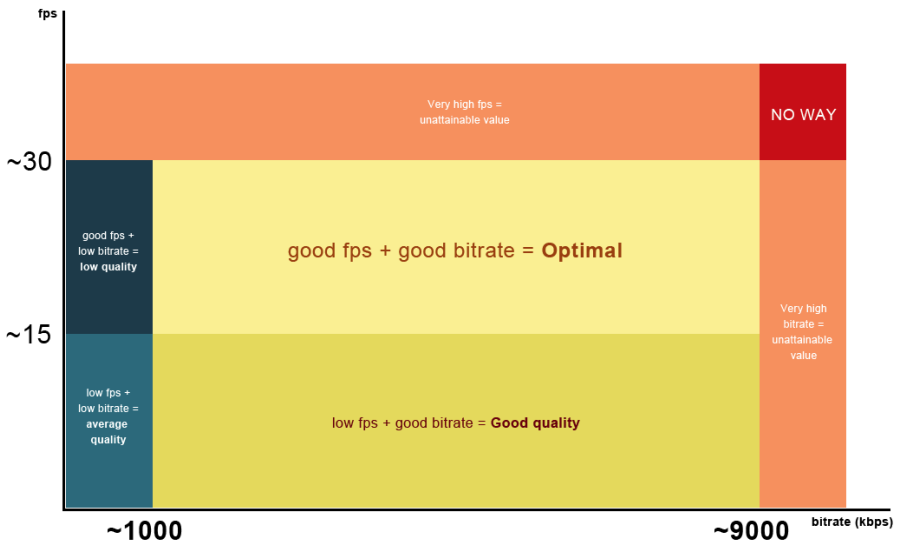

21 Troubleshooting

In this chapter you will find some solutions to some of the more common situations and issues you may come across.

Observation	Corrective action
I have connected a video source to the Lecture Recorder x2's DVI In or S-Video ports but I am not sure whether the connected source is being received from the incoming ports	For the DVI In port: 1. Connect a DVI or VGA monitor to a Lecture Recorder x2's DVI Out port (use DVI-VGA adapter if necessary) and view the stream on the monitor. For the S-Video port: 1. Unplug a cable from a DVI In port (if any). 2. Ensure that the video channel is enabled on the Stream Setup page in Web Admin Interface. 3. Look at the red LED. If it is blinking, the signal is being received from the S-Video port.
No sound is coming from an audio source	Verify the Input Source parameter value in the Audio menu item of the web interface. It should correspond to the selected source type (Line or Microphone).
Too much noise on audio	Verify the Input Amplifier Volume parameter value in the Audio menu item of the web interface. It is recommended to select 40% in this field.
Insufficient image quality	To provide better productivity and higher image quality: 1. Make sure that the source resolution matches the resolution of the recorded image. Ensure that the Frame size parameter value in the Stream Setup menu item of the web interface equals the frame size of the source image. Example: If the source video resolution is 720p, set the Frame size to 1280x720

	2. Increase the Bitrate value and/or decrease the Limit frame rate value in the Stream Setup menu item.
Low fps	Increase the Limit frame rate value and/or decrease the Bitrate value in the Stream Setup menu item. Refer to Streaming for details. Alternatively, enter low negative value (-5) in the Frame Grabber's Vertical Shift field.
I cannot play the broadcast in my media player/browser	First, check the LEDs activity on the Lecture Recorder x2. Normally during the broadcast the green LED lights up while the Red LED is blinking. If the broadcast is being recorded, the blue LED is blinking too. Further, verify whether the Stream Type parameter in the Stream Setup corresponds to the media player being used. Refer to Video Formats and Standards for details. If the issue is not solved, disable all firewalls (Windows). If the suggested steps do not solve your issue, please contact Epiphan Support.
The broadcast interrupts or the image breaks up	Verify the Stream Setup settings as described above in "Insufficient image quality". If the issue is not solved, verify your network connections as well as network filters, routers and applications settings. Packet loss may result in broadcast failure.
Record issues	If the record does not start up, view the Disk Status Information and check whether there is enough disk space for a new file of desired size. If the issue is not solved, perform a Disk Check and start the record again.
Firmware upgrade	If you are unable to upgrade firmware manually, i.e. upload firmware to the device from your working station, reboot the device and retry.

22 Table of Figures

Figure 1 Front View of the Lecture Recorder x2	7
Figure 2 The Lecture Recorder x2's Rear Panel	9
Figure 3 3.5mm Mini-jack	10
Figure 4 VGA to DVI cable	11
Figure 5 DVI to DVI cable	12
Figure 6 S-Video cable	13
Figure 7 Composite to S-Video cable	14
Figure 8 HDMI to DVI adapter.....	14
Figure 9 RJ-45 Male cable	15
Figure 10 Web Admin Interface's Main Menu	21
Figure 11 Data Capture Flow in case of Single Stream Mode	23
Figure 12 Data Capture Flow in case of Independent Stream Mode	23
Figure 13 Data Streaming Flow	24
Figure 14 Frame Grabber Adjustments.....	28
Figure 15 Stream Settings	31
Figure 16 DVI Channel Settings	32
Figure 17 Video Channel Settings	35
Figure 18 Setting Background Color	38
Figure 19 Common Settings.....	39
Figure 20 Audio Settings	40
Figure 21 Protocol Stack Diagram	42
Figure 22 Using a CDN Service Increases Scalability of Concurrent Viewers	44
Figure 23 URL to Epiphan Server	45
Figure 24 System Message in Case of Excessive Bitrate Speed	46
Figure 25 System Message after Setting H.264 codec and Reducing Bitrate	46
Figure 26 Epiphan's Portal	47
Figure 27 Plugins Available for Selection on the Portal	47
Figure 28 Code for Stream Embedding	48
Figure 29 Listing of Direct URLs	48
Figure 30 RTSP Announce Functionality	49
Figure 31 RTP/UDP Push Functionality	51
Figure 32 MPEG-TS UDP Push Functionality	52
Figure 33 MPEG-TS RTP/UDP Push Functionality	53
Figure 34 UPnP Option in the Media Player's Interface	54
Figure 35 Live Streams and Recorded Files Folders	55
Figure 36 Sorted Files in the Folders.....	55
Figure 37 Selecting Live Stream	56
Figure 38 URLs of the Broadcast Displayed in the Stream Info Section.....	58
Figure 39 A Broadcast with its URL Displayed Under the Broadcast Image	59
Figure 40 Viewing a Broadcast Using a Web Browser	60

Figure 41 Select Recording Format	65
Figure 42 Changing Time Limit and Size Limit.....	66
Figure 43 Recorder Status.....	67
Figure 44 Broadcasts Coming from Two Input Sources (Independent Streams Mode)	68
Figure 45 Recorded Files	69
Figure 46 A USB Flash Drive Connected to a USB port Receives Recorded Data.....	72
Figure 47 Insert a USB Flash Disk	73
Figure 48 The File is Being Copied Now	74
Figure 49 Configuring the Automatic File Upload Feature	76
Figure 50 Configuring a CIFS Client	78
Figure 51 Configuring an RSync Client	79
Figure 52 Configure an FTP Client.....	80
Figure 53 FTP Server Options.....	82
Figure 54 Search for EpiphanTouch in the App Store	85
Figure 55 Log into the Lecture Recorder x2 as the Administrator	86
Figure 56 Enabling DHCP	89
Figure 57 Statistics displayed by the diagnostics tool after using the Ping utility	90
Figure 58 Statistics displayed by the diagnostics tool after using the Traceroute utility	90
Figure 59 Setting the Date and Time	92
Figure 60 Adding or Changing the Administrator's Password	94
Figure 61 Changing the Operator password	95
Figure 62 Changing the Viewer Password.....	95
Figure 63 IP-based Authentication	96
Figure 64 Firmware Upgrade	99
Figure 65 Maintenance Options	100
Figure 66 Lecture Recorder x2 Information	103
Figure 67 Configuring the Serial Port Feature	105
Figure 68 Customizing Web Content	105
Figure 69 Stream Branding	107
Figure 70 Video Stream with a Configured Logo	108
Figure 71 Remote Support Configuration	110
Figure 72 Configuring the Disk Maintenance Schedule	112
Figure 73 Correlation Between FPS and Bitrate Values at Resolution 1280x720 ...	122
Figure 74 Correlation Between FPS and Bitrate Values at Resolution 1920x1080 ..	122
Figure 75 Correlation Between FPS and Bitrate Values at Resolution 640x480	123

23 Software and Documentation License

ATTENTION: THE SOFTWARE AND DOCUMENTATION PROVIDED UNDER THIS AGREEMENT ARE BEING LICENSED TO YOU BY EPIPHAN SYSTEMS INC. ("LICENSOR") AND ARE NOT BEING SOLD. THIS AGREEMENT CONTAINS LIMITATIONS ON REPRESENTATIONS, WARRANTIES, CONDITIONS, REMEDIES, AND LIABILITIES THAT ARE APPLICABLE TO THE SOFTWARE AND DOCUMENTATION.

Epiphan Systems Inc. Software License

IMPORTANT: BEFORE DOWNLOADING, INSTALLING, OR USING THE SOFTWARE AND DOCUMENTATION, PLEASE CAREFULLY READ THIS AGREEMENT WHICH CONTAINS THE TERMS AND CONDITIONS UNDER WHICH YOU ARE ACQUIRING A LICENSE TO USE THE SOFTWARE AND DOCUMENTATION. IF YOU DO NOT ACCEPT THE TERMS AND CONDITIONS OF THIS AGREEMENT PLEASE DO NOT DOWNLOAD, INSTALL, OR USE THE SOFTWARE AND DOCUMENTATION AND PROMPTLY RETURN OR DESTROY THE SOFTWARE AND DOCUMENTATION. IF YOU DOWNLOAD, INSTALL, OR USE THE SOFTWARE AND/OR DOCUMENTATION, YOU WILL HAVE ACCEPTED AND AGREED TO THESE TERMS AND CONDITIONS. THE SOFTWARE AND DOCUMENTATION ARE ALSO PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL COPYRIGHT TREATIES, AS WELL AS OTHER INTELLECTUAL PROPERTY LAWS. IF YOU ARE AN AGENT OR EMPLOYEE OF AN ENTITY, YOU REPRESENT AND WARRANT THAT (I) THE INDIVIDUAL ACCEPTING THIS AGREEMENT IS DULY AUTHORIZED TO ACCEPT THIS AGREEMENT ON SUCH ENTITY'S BEHALF AND TO BIND SUCH ENTITY, AND (II) SUCH ENTITY HAS FULL POWER, CORPORATE OR OTHERWISE, TO ENTER INTO THIS AGREEMENT AND PERFORM ITS OBLIGATIONS UNDER THIS AGREEMENT.

1. Definitions: In this Agreement:

"Agreement" means this Epiphan Software License;

"Documentation" means the technical publications delivered to You with the Software relating to the installation and operation of the Software, such as reference, user, installation and technical guides and release notes;

"Epiphan" means Epiphan Systems Inc.;

"Software" means the Licensor binary and/or bytecode software programs that (i) are made available to You for download after acceptance of this Agreement, (ii) are packaged with this Agreement, or (iii) pre-installed on Epiphan products, or (iv) embed this Agreement in their installer(s) and which are installed after acceptance of this Agreement, and which binary and/or bytecode software programs include any Documentation; and

"You" or "Your" means the individual acquiring the Software license or any entity on whose behalf such individual is acting. In the case of an entity, "You" includes any entity that by majority voting interest controls, is controlled by, or is under common control with You.

2. Grant of Software License: Subject to the terms and conditions of this Agreement, Licensor grants You a non-exclusive, non-transferable, non-sublicensable, internal license to use a reasonable number of copies of the Software. All copies of the Software made by You shall include all trademarks, copyright notices, restricted rights legends, proprietary markings and the like exactly as they appear on the copy of the Software originally provided to You. No other rights in the Software or Documentation are granted to You.

3. Open Source Software: Binary, bytecode and source code versions of certain open source software packages may be embedded in or distributed with the Software ("Open Source Software"). If a separate license agreement for an item of open source software is: delivered to You with the Software; included in the download package for the Software; referenced in any material (including the Documentation) that is included in the download or distribution package for the Software; or listed at www.epiphany.com/opensource, then such open source software shall be Open Source Software and such separate license agreement shall govern Your use of that item or version of such open source software. The Open Source Software may include free software (i.e. software licensed under the GNU Lesser General Public License or other free software licenses) for which the applicable free software license may also require that the source code for such free software be made available to those receiving only executable versions of such free software. If the source code for any free software distributed with the Software is not provided with the Software, then upon request, within a three (3) year period from the original receipt of such Open Source Software from Licensor, for a fee that shall not exceed Licensor's costs associated with the shipping of the source code for such free software, Licensor will provide a copy of the source code for such free software to You.

4. Restrictions: The terms set forth in this Section 4 shall constitute conditions to the licenses granted in Section 2. You shall not reverse engineer, disassemble, reverse translate, decompile or in any other manner decode the Software except to the extent the Software is distributed with any Open Source Software that prohibits the imposition of such a restriction or to the extent the foregoing restriction is expressly prohibited by applicable law notwithstanding a contractual obligation to the contrary. You acknowledge and agree that no rights in respect to the source code of the Software are granted to You. You acknowledge and agree that the rights in respect to use of the Software and Documentation are granted only for use in conjunction with Epiphany hardware. You shall not distribute, lease, rent, grant a security interest in, assign, or otherwise transfer the Software except as expressly provided in this Agreement. You shall not modify or create any derivatives works of the Software or merge all or any part of the Software with another program. You shall not use the Software or make the Software available to any third parties as part of any service bureau, time sharing service, application service provider offering, software-as-a-service offering or any other managed service offering. You shall not disclose any performance, benchmarking, or feature-related information about the Software. You further agree not to disclose, transfer or otherwise provide to any third party any portion of the Software, except as expressly permitted herein.

5. Disclaimer of Warranties: Licensor does not make any representations or provide any warranties or conditions in respect to the Software. **EXCEPT FOR ANY WARRANTIES THAT MAY BE PROVIDED IN ANY COMMERCIAL AGREEMENT BETWEEN YOU AND LICENSOR, THE SOFTWARE AND DOCUMENTATION ARE PROVIDED "AS IS", WITHOUT ANY REPRESENTATIONS, CONDITIONS, OR WARRANTIES OF ANY KIND. WITHOUT LIMITATION, LICENSOR AND ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND DISTRIBUTORS DISCLAIM ANY EXPRESS OR IMPLIED REPRESENTATIONS, CONDITIONS, AND/OR WARRANTIES OF MERCHANTABILITY, MERCHANTABLE QUALITY, NON-INFRINGEMENT, DURABILITY, TITLE, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE WHETHER ARISING BY STATUTE, COURSE OF DEALING, USAGE OF TRADE, OR OTHERWISE. EXCEPT AS OTHERWISE EXPRESSLY PROVIDED IN ANY COMMERCIAL AGREEMENT, THE ENTIRE RISK OF THE USE OF THE SOFTWARE AND DOCUMENTATION SHALL BE BORNE BY YOU. EXCEPT AS OTHERWISE EXPRESSLY PROVIDED IN ANY COMMERCIAL AGREEMENT, NEITHER LICENSOR NOR ANY OF ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND/OR DISTRIBUTORS MAKE ANY REPRESENTATIONS OR PROVIDE ANY CONDITIONS AND/OR WARRANTIES ABOUT THE SUITABILITY OF THE SOFTWARE AND/OR DOCUMENTATION OR ABOUT ANY INFORMATION AND/OR DATA THAT MAY BE PROCESSED BY OR MADE AVAILABLE USING THE SOFTWARE.**

6. LIMITATION OF LIABILITY: NEITHER LICENSOR NOR ANY OF ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND/OR DISTRIBUTORS SHALL HAVE ANY LIABILITY TO YOU OR ANY OTHER PERSON OR ENTITY FOR ANY DAMAGES ARISING FROM THIS AGREEMENT, RELATING TO THE SOFTWARE OR DOCUMENTATION, OR RELATING TO ANY SERVICES PROVIDED TO YOU BY LICENSOR (INCLUDING ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND/OR DISTRIBUTORS) IN RELATION TO THE SOFTWARE AND/OR DOCUMENTATION FOR ANY INDIRECT, RELIANCE, INCIDENTAL, SPECIAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOSS OF REVENUE OR PROFIT, LOSS OF OR DAMAGE TO DATA, BUSINESS INTERRUPTION, LOSS OF DATA, REPLACEMENT OR RECOVERY COSTS, OR OTHER COMMERCIAL OR ECONOMIC LOSS, WHETHER ARISING FROM CONTRACT, EQUITY, TORT (INCLUDING NEGLIGENCE OR STRICT LIABILITY) OR ANY OTHER THEORY OF LIABILITY, EVEN IF LICENSOR (INCLUDING ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND DISTRIBUTORS) HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, OR THEY ARE FORESEEABLE. THE LIMITATIONS IN THIS SECTION SHALL APPLY WHETHER OR NOT THE ALLEGED BREACH OR DEFAULT IS A BREACH OF A FUNDAMENTAL CONDITION OR TERM OR FUNDAMENTAL BREACH. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, SO THESE LIMITATIONS MAY NOT APPLY TO YOU. IN NO EVENT SHALL THE TOTAL CUMULATIVE LIABILITY OF LICENSOR (INCLUDING ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND DISTRIBUTORS) TO YOU OR ANY OTHER PERSON OR ENTITY FOR ANY DAMAGES ARISING FROM THIS AGREEMENT, RELATING TO THE SOFTWARE, DOCUMENTATION AND/OR RELATING TO ANY SERVICES PROVIDED TO YOU BY LICENSOR (INCLUDING ITS LICENSORS, SUPPLIERS, SUBCONTRACTORS AND DISTRIBUTORS) IN RELATION TO THE SOFTWARE AND/OR DOCUMENTATION, EXCEED THE LICENSE FEES PAID BY YOU FOR THE SOFTWARE.

THE DISCLAIMER OF REPRESENTATIONS, WARRANTIES AND CONDITIONS AND LIMITATION OF LIABILITY CONSTITUTE AN ESSENTIAL PART OF THIS AGREEMENT. YOU ACKNOWLEDGE THAT BUT FOR THE DISCLAIMER OF REPRESENTATIONS, WARRANTIES AND CONDITIONS AND LIMITATION OF LIABILITY, NEITHER LICENSOR NOR ANY OF ITS LICENSORS OR SUPPLIERS WOULD GRANT THE RIGHTS GRANTED IN THIS AGREEMENT.

7. Term and Termination: This Agreement shall continue for as long as You use the Software, however, it may be terminated sooner as provided in this Section 7. You may terminate this Agreement by destroying all copies of the Software and Documentation under Your control and providing certification of such destruction to Licensor or by returning the Software to Licensor. Licensor may terminate this Agreement immediately by providing You with written notice if: (a) You are in material breach of any provision of this Agreement, which breach, if capable of being cured, is not cured within thirty (30) days after Licensor gives You written notice thereof; or (b) You have committed a non-curable material breach of this Agreement. Upon termination You shall destroy all copies of the Software. In addition to this Section, the Sections entitled Definitions, Disclaimer of Warranties, Limitation of Liability, Title, High-Risk Activities, Intellectual Property, and General shall continue in force even after any termination of this Agreement. No termination of this Agreement will entitle You to a refund of any amounts paid by You to Licensor or affect any obligations You may have to pay any outstanding amounts owing to Licensor. Upon any termination by Licensor, You shall destroy all copies of the Software and Documentation under Your control and certify such destruction to Licensor.

8. Support and Updates: This Agreement does not grant You the right to any updates or enhancements of the Software or the right to receive any technical support for the Software. Such updates and other technical support services, if available, may be purchased separately from Licensor. Use of any updates or enhancements to the Software provided pursuant to any technical support You may procure from Licensor shall be governed by the terms and conditions of this Agreement. Licensor reserves the right at any time not to release or to discontinue the release of any Software and to alter prices, features, specifications, capabilities, functions, licensing terms, release dates, general availability or other characteristics of the Software.

9. Title: All right, title, and interest (including all intellectual property rights) in, to, and under the Software (including all copies thereof) shall remain with Licensor and its licensors.

10. High-Risk Activities: The Software is not fault-tolerant and is not designed, manufactured or intended for use in or in conjunction with on-line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation systems, air traffic control, or direct life support machines. Licensor, its licensors, suppliers, subcontractors and distributors specifically disclaim any express or implied representations, warranties and/or conditions for such uses.

11. U.S. Government End-Users: The Software and Documentation are each a "commercial item" as that term is defined at FAR 2.101, consisting of "commercial computer software" and "commercial computer software documentation" as such terms are defined in FAR 12.212, and are provided to the U.S. Government only as commercial end items. Government end users acquire the rights set out in this Agreement for the Software and Documentation consistent with: (i) for acquisition by or on behalf of civilian agencies, the terms set forth in FAR12.212; or (ii) for acquisition by or on behalf of units of the Department of Defense, the terms set forth in DFARS 227.7202. Use of the Software and Documentation is further restricted by the terms and conditions of this Agreement. For the purposes of any applicable government use, the Software and Documentation were developed exclusively at private expense, and are trade secrets of Epiphan Systems Inc. for the purpose of any Freedom of Information legislation or any other disclosure statute, regulation or provision.

12. Export Restrictions: The Software, Documentation and related information are subject to export and import restrictions. By downloading, installing, or using the Software, Documentation and/or related information, You are representing and warranting that You are not located in, are not under the control of, and are not a national or resident of any country to which the export of the Software, Documentation and/or related information would be prohibited by the laws and/or regulations of Canada or the United States. You are also representing and warranting that You are not an individual to whom the export of the Software, Documentation or related information would be prohibited by the laws and/or regulations of Canada or the United States. You shall comply with the export laws and regulations of Canada and the United States that are applicable to the Software, Documentation and related information and You shall also comply with any local laws and/or regulations in Your jurisdiction that may impact Your right to export, import, or use the Software, Documentation or related information, and You represent and warrant that You have complied with any such applicable laws and/or regulations. The Software, Documentation and related information shall not be used for any purposes prohibited by export laws and/or regulations, including, without limitation, nuclear, chemical, or biological weapons proliferation. You shall be responsible for procuring all required permissions for any subsequent export, import, or use of the Software, Documentation or related information.

13. Intellectual Property: Epiphan is a trademark or a registered trademark of Epiphan Systems Inc. in certain countries. All Licensor product names and logos are trademarks or registered trademarks of Epiphan Systems Inc. in certain countries. All other company and product names and logos are trademarks or registered trademarks of their respective owners in certain countries. You shall not disclose, transfer or otherwise provide to any third party any portion of the Software, except as expressly permitted in this Agreement.

14. General: This Agreement is the entire agreement between You and Licensor in respect to the Software, superseding any other agreements or discussions, oral or written. The terms and conditions of this Agreement shall prevail over any pre-printed terms on any quotes, orders, purchase orders, or purchase order acknowledgements, and shall prevail over any other communications between the parties in relation to the Software. You may not assign this Agreement whether voluntarily, by operation of law, or otherwise without Licensor's prior written consent. Licensor may assign this Agreement at any time

without notice. The failure of a party to claim a breach of any term of this Agreement shall not constitute a waiver of such breach or the right of such party to enforce any subsequent breach of such term. If any provision of this Agreement is held to be unenforceable or illegal, such decision shall not affect the validity or enforceability of such provisions under other circumstances or the remaining provisions of this Agreement and such remaining provisions shall be reformed only to the extent necessary to make them enforceable under such circumstances. This Agreement shall be governed by the laws of the Province of Ontario and the laws of Canada applicable therein. No choice or conflict of laws rules of any jurisdiction shall apply to this Agreement. You shall only be entitled to bring any action or proceeding arising out of or relating to this Agreement, the Software, Documentation or any services provided in respect to the Software and/or Documentation in a court in Ottawa, Ontario, Canada, and You consent to the jurisdiction of such courts for any such action or proceeding. You waive all rights that You may have or that may hereafter arise to contest the jurisdiction of such courts for any action or proceeding brought by You. You hereby waive any right You may have to request a jury trial with respect to any action brought by You in connection with this Agreement, the Software or any services provided in respect to the Software. The application of the United Nations Convention on Contracts for the International Sale of Goods to this Agreement is expressly excluded.

March 11, 2013

Environmental Information

The equipment that you bought has required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

In order to avoid the dissemination of those substances in our environment and to diminish the pressure on the natural resources, we encourage you to use the appropriate take-back systems. Those systems will reuse or recycle most of the materials of your end life equipment in a sound way.

The crossed-out wheeled bin symbol invites you to use those systems. If you need more information about collection, reuse and recycling systems, please contact your local or regional waste administration. You can also contact us for more information on the environmental performance of our products.

FCC & CE Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Marking by the symbol  indicates compliance of this device with EMC directive of the European Community and meets or exceeds the following technical standard.

EN 55022 - Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment.



Other Jurisdictional Issues

Epiphan makes no representation that its products or information in this document or its web site is appropriate or available for use in your jurisdiction. Those who choose to access the Epiphan web site or use Epiphan products do so on their own initiative and are responsible for compliance with local laws, if and to the extent local laws are applicable.

Submissions to Epiphan and Affiliated Servers

Any information, including but not limited to remarks, suggestions, ideas, graphics, or other submissions, communicated to Epiphan through their Epiphan web site is the exclusive property of Epiphan. Epiphan is entitled to use any information submitted for any purpose, without restriction (except as stated in Epiphan's Privacy Statement) or compensation to the person sending the submission. The user acknowledges the originality of any submission communicated to Epiphan and accepts responsibility for its accuracy, appropriateness, and legality.

Third Parties and Links to Third-Party Web Sites

Mention of non-Epiphan Systems Inc. products or services on their website, or this document site is for informational purposes and does not constitute an endorsement or recommendation.

This document may contain links to non-Epiphan web sites. These links are provided to you as a convenience, and Epiphan is not responsible for the content of any linked web site. Any outside web site accessed from the Epiphan web site is independent from Epiphan, and Epiphan has no control over the content of that web site. In addition, a link to any non-Epiphan web site does not imply that Epiphan endorses or accepts any responsibility for the content or use of such a web site.

In no event shall any reference to any third party or third party product or service be construed as an approval or endorsement by Epiphan of that third party or of any

product or service provided by a third party.

Miscellaneous

It is the user's responsibility to ascertain whether any information downloaded from the Epiphan web site or other websites is free of viruses, worms, trojan horses, or other items of a potentially destructive nature.

Enforcement of Terms and Conditions

These Terms and Conditions for use of this document and the associated Epiphan Product are governed and interpreted pursuant to the laws of the province of Ontario, Canada, notwithstanding any principles of conflicts of law.

All disputes arising out of or relating to these Terms and Conditions shall be finally resolved by arbitration conducted in the English language in Ottawa, Ontario, Canada under the commercial arbitration rules of the Canada. The parties shall appoint as sole arbitrator a retired judge who presided in the province of Ontario. The parties shall bear equally the cost of the arbitration (except that the prevailing party shall be entitled to an award of reasonable attorneys' fees incurred in connection with the arbitration in such an amount as may be determined by the arbitrator). All decisions of the arbitrator shall be final and binding on both parties and enforceable in any court of competent jurisdiction. Notwithstanding this, application may be made to any court for a judicial acceptance of the award or order of enforcement. Notwithstanding the foregoing, Epiphan shall be entitled to seek injunctive relief, security, or other equitable remedies from any court of competent jurisdiction.

If any part of these terms is unlawful, void, or unenforceable, that part will be deemed severable and will not affect the validity and enforceability of the remaining provisions. Epiphan may, at its sole discretion and without notice, revise these terms at any time by updating this posting.

Copyright © 2013 Epiphan Systems Inc.
All Rights Reserved.

24 Configuration Worksheet

Use this worksheet to keep necessary information about the Lecture Recorder x2 installation, settings etc.

Parameter (IP address, DNS server, SSID...)	Value

Notes:

